



## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING



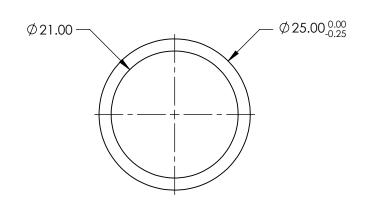





**BANDPASS FILTER** 

|                            | VALUE                          |  |
|----------------------------|--------------------------------|--|
| OPTICAL DENSITY            | ≥4.0                           |  |
| CENTER WAVELENGTH (CWL)    | 440 +3.0/-1.0 nm               |  |
| FULL WIDTH HALF MAX (FWHM) | 10 ±5 nm                       |  |
| MINIMUM TRANSMISSION       | TRANSMISSION >45 %             |  |
| BLOCKING                   | 200 - Far IR                   |  |
| SURFACE QUALITY            | 80-50                          |  |
| CONSTRUCTION               | MOUNTED IN BLACK ANODIZED RING |  |
| COATING TYPE               | TRADITIONAL COATED             |  |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

|  | Edmund | Optics® |
|--|--------|---------|
|  |        |         |

| _ |                        |            |        | <b>_</b>                          |                 |
|---|------------------------|------------|--------|-----------------------------------|-----------------|
|   | THIRD ANGLE PROJECTION |            | TITLE  | Ø25mm, 440nm x 10nm, INTERFERENCE | FILTER          |
|   | 1 KOJECIION            | <i>Y</i> 7 |        |                                   |                 |
|   | ALL DIMS IN            | mm         | DWG NO | 67831                             | SHEET<br>1 OF 1 |