



FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING



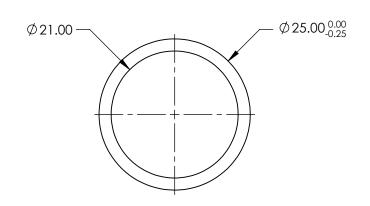





	VALUE
OPTICAL DENSITY	≥4.0
CENTER WAVELENGTH (CWL)	460 +3.0/-1.0 nm
FULL WIDTH HALF MAX (FWHM)	10 ±5 nm
MINIMUM TRANSMISSION	>50 %
BLOCKING	200 - Far IR
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED RING
COATING TYPE	TRADITIONAL COATED

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	Edmund Optics®
	COLUMN AVOIS NOT INTERESTRATED

_)	•	
	THIRD ANGLE PROJECTION		TITLE	Ø25mm, 460nm x 10nm, INTERFERENCE	FILTER
_	ALL DIMS IN	mm	DWG NO	67832	SHEET 1 OF 1