

NOTES:

- 1. SUBSTRATE: VACUUM UV GRADE CaF2
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO <1 arcmin
- 3. COATING (APPLY ACROSS CLEAR APERTURE) S1 & S2: NONE





SHEET 1 OF 1

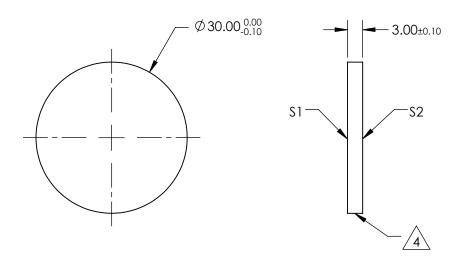

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø27.00	Ø27.00
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

			Edmund Optics®	
HIRD ANGLE . ROJECTION	ϕ	TITLE	Ø30mm, UNCOATED, CALCIUM FLUORIDE WINDOW	
ALL DIMS IN	mm	DWG NO	63208	SHEET