NOTES:


1. SUBSTRATE:

FLOAT GLASS

 ANTI REFLECTION SURFACE TREATMENT (APPLY ACROSS CLEAR APERTURE) AOI: 0°
\$1 & \$2: Ravg ≤0.5% @ 425 - 700nm





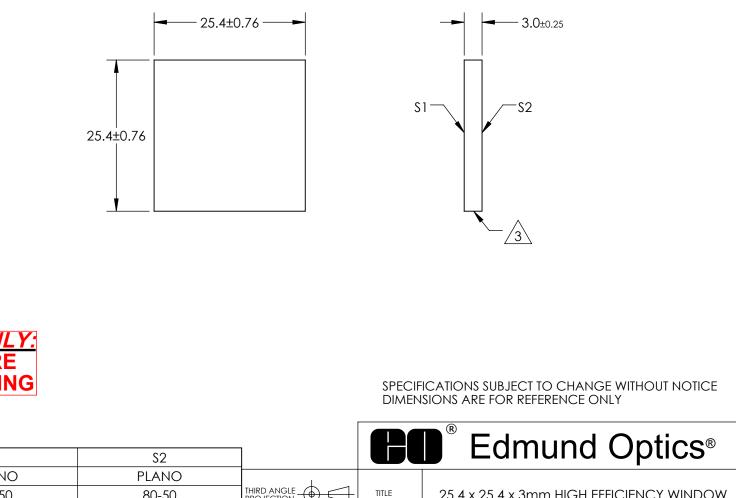

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

|                 | \$1                  | \$2                  | ]                         |                     | H      | Edmund Optic                        | CS®             |
|-----------------|----------------------|----------------------|---------------------------|---------------------|--------|-------------------------------------|-----------------|
| SHAPE           | PLANO                | PLANO                |                           | 1                   |        |                                     |                 |
| SURFACE QUALITY | 80-50                | 80-50                | THIRD ANGLE<br>PROJECTION | $\bigcirc \bigcirc$ | TITLE  | 25.4 x 25.4 x 3mm HIGH EFFICIENCY W | INDOW           |
| CLEAR APERTURE  | ≥90%                 | ≥90%                 |                           | 1                   |        |                                     | CULET           |
| BEVEL           | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | ALL DIMS IN               | mm                  | DWG NO | 46097                               | SHEET<br>1 OF 1 |
|                 |                      |                      |                           |                     |        |                                     |                 |