NOTES:


- SUBSTRATE: Float Glass
- 2. COATING (APPLY ACROSS CLEAR APERTURE) \$1: Protected Aluminum (400-700nm) R(AVG) >85% @ 400 - 700nm @ 45°


S2: NONE



SEAMED EDGES

Rohs Compliant

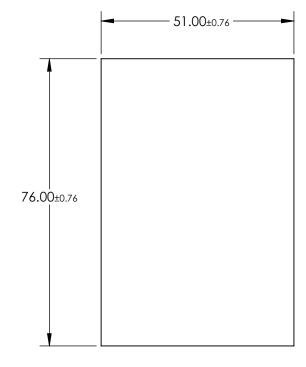

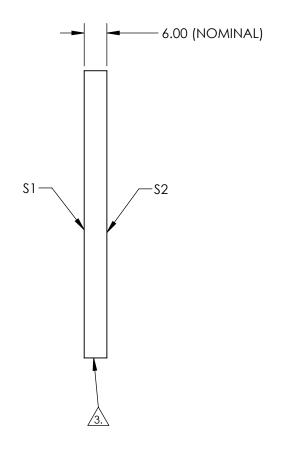

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	S1 PLANO	\$2 PLANO				Edmund Optic	S [®]
SURFACE QUALITY	80-50	N/A				51 x 76mm, 4-6λ Mirror	
SURFACE FLATNESS	4 - 6λ	N/A	THIRD ANGLE PROJECTION	$\oplus \lhd$	TITLE	31 x 7 6(1)(1), 4-6)(1)(1)(1)	
CLEAR APERTURE	Ø 45.9 x 68.4	N/A					CLIEFT
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	40040	SHEET 1 OF 1