NOTES:

1. SUBSTRATE: FUSED SILICA


2. COATING (APPLY ACROSS CLEAR APERTURE)


S1: UNCOATED


S2: UNCOATED



4. RoHS COMPLIANT

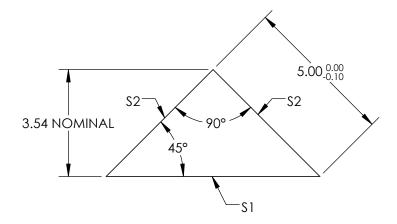





FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

S1 **S**2 REV. A **PLANO PLANO** SHAPE ±40 ±40 ANGLE TOLERANCE (arcsec) ±1 ±1 PYRAMID TOLERANCE (arcmin) 20-10 20-10 SURFACE QUALITY λ/10 λ/10 SURFACE FLATNESS PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED BEVEL

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

		Edmund Optics®		
THIRD ANGLE - PROJECTION	\$	TITLE	5mm UNCOATED, FUSED SILICA HIGH TOLERANCE RA PRISM	
ALL DIMS IN	mm	DWG NO	47200	SHEET 1 OF 1