## NOTES:

1. SUBSTRATE: FUSED SILICA


2. COATING (APPLY ACROSS CLEAR APERTURE)


S1: UNCOATED


S2: UNCOATED



4. Rohs Compliant

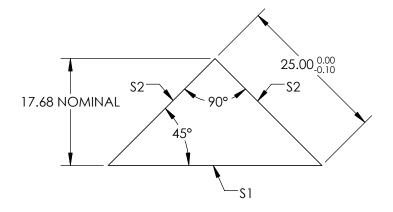





## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

**S**2 REV. A **S**1 **PLANO PLANO** SHAPE ±40 ±40 ANGLE TOLERANCE (arcsec) ±1 ±1 PYRAMID TOLERANCE (arcmin) SURFACE QUALITY 20-10 20-10 λ/10 λ/10 SURFACE FLATNESS PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED BEVEL

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			Eamuna Optic	S®
THIRD ANGLE PROJECTION		TITLE	25mm UNCOATED, FUSED SILICA HIGH TOLERANCE RA PRISM	
ALL DIMS IN	mm	DWG NO	47204	SHEET 1 OF 1