


FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

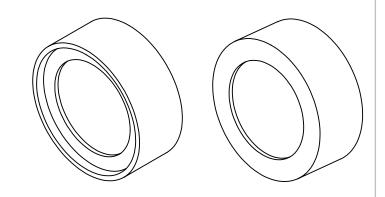



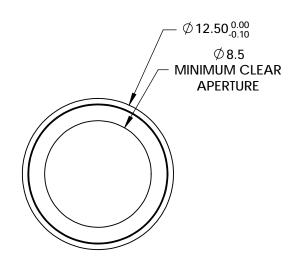

| | - 5.00 ±0.10 |
|--|---------------------|
| | |
| | |
| | |

BANDPASS FILTER

| REV. 001 | VALUE |
|----------------------------|---|
| CENTER WAVELENGTH (CWL) | 320 ± 2nm |
| FULL WIDTH HALF MAX (FWHM) | 10 ± 2nm |
| MINIMUM TRANSMISSION | ≥85 |
| BLOCKING | 200 - 1200nm |
| SURFACE QUALITY | 80-50 |
| CONSTRUCTION | MOUNTED IN BLACK ANODIZED ALUMINUM RING |
| COATING TYPE | HARD COATED |
| DURABILITY | MIL-C-48497A, SECT. 3.4.1 |
| ENVIRONMENTAL | MII -STD-801F SECT 507 4 |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| | | | Edmund Optic | S® |
|------------------------|----|--------|------------------------------------|-----------------|
| THIRD ANGLE PROJECTION | | TITLE | OD4, Ø12.5mm, 320nm x 10nm, HC, BP | FILTER |
| ALL DIMS IN | mm | DWG NO | 34974 | SHEET 1 OF 1 |