NOTES:

1. SUBSTRATE: FUSED SILICA


2. COATING (APPLY ACROSS CLEAR APERTURE)


S1: UNCOATED


S2: UNCOATED



4. Rohs Compliant

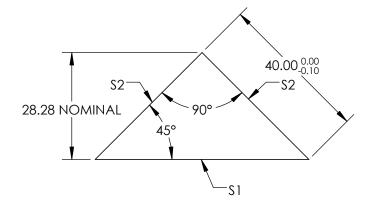





FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	\$1	\$2	
SHAPE	PLANO	PLANO	
SURFACE FLATNESS	λ/2	λ/2	
SURFACE QUALITY	60-40	60-40	
ANGLE TOLERANCE (arcmin)	±5	±5	
PYRAMID TOLERANCE (arcmin)	±5	±5	
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	

			Edmund Optics®		
THIRD ANGLE 40mm, UNCOATED, FU ANGLE PRISM		40mm, UNCOATED, FUSED SILICA, RIG ANGLE PRISM	HT		
	ALL DIMS IN	mm	DWG NO	47788	SHEET 1 OF 1