

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2:
LASER V-COAT

R(abs) <0.25% @ 405nm
R(avg) <1.5% @ 375 - 435nm

3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

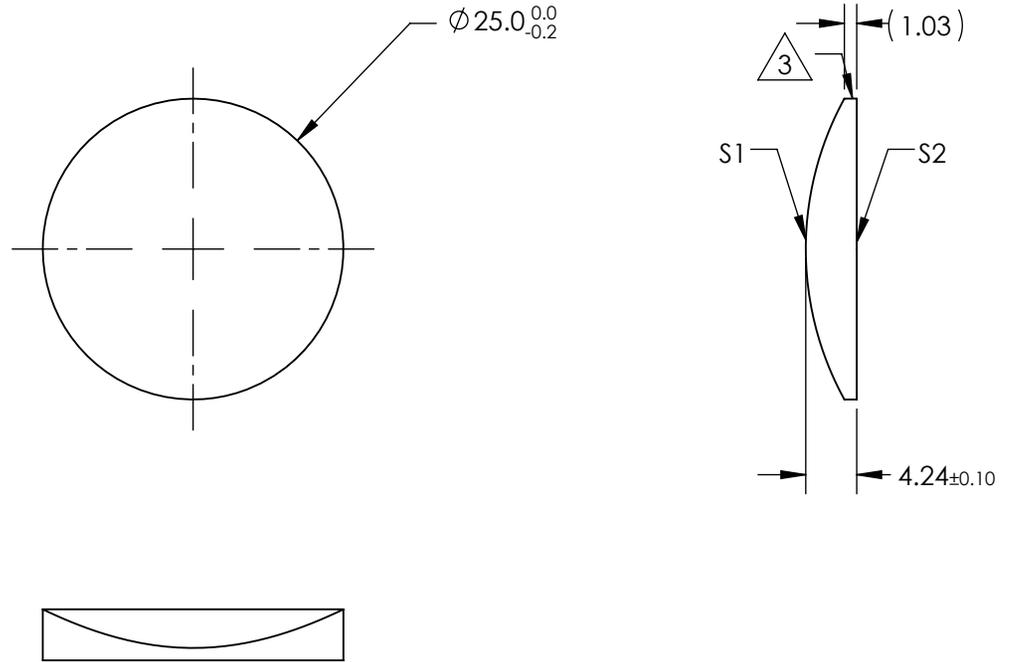

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	50±3%	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	(47.2)			
RADIUS	25.93	∞	THIRD ANGLE PROJECTION		DWG NO	33220	
SURFACE QUALITY	60-40	60-40	ALL DIMS IN		mm	SHEET 1 OF 1	
CLEAR APERTURE	$\varnothing 24.00$	$\varnothing 24.00$	PROTECTED AS NEEDED		PROTECTED AS NEEDED		
COATING APERTURE	$\varnothing 24.00$	$\varnothing 24.00$					
BEVEL							