

NOTES:


1. SUBSTRATE MATERIAL:  
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR (400-1000nm)  
R(ABS) ≤0.25% @ 880nm  
R(AVG) ≤1.25% @ 400 - 870nm  
R(AVG) ≤1.25% @ 890 - 1000nm


 FINE GROUND SURFACE

4. RoHS COMPLIANT

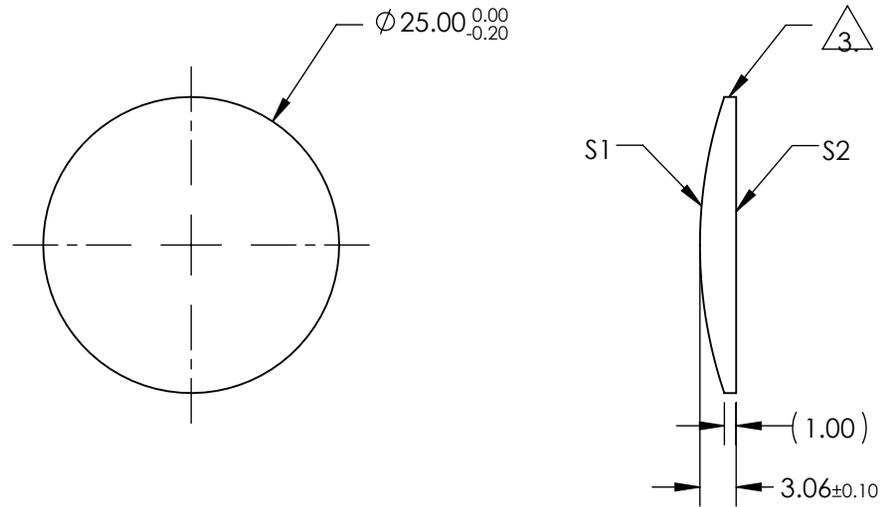

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

|                 |                      |                      |   |       |   |   |                 |
|-----------------|----------------------|----------------------|---|-------|---|---|-----------------|
|                 | S1                   | S2                   | EFL   | 75.00 |  <b>Edmund Optics®</b> | 25mm DIA X 75mm FL VIS-NIR COATED,<br>CYLINDER LENS |                 |
| SHAPE           | CONVEX               | PLANO                | BFL   | 72.89 |   |   |                 |
| RADIUS          | 38.89                | INFINITY             |  |       | TITLE   | 25mm DIA X 75mm FL VIS-NIR COATED,<br>CYLINDER LENS |                 |
| SURFACE QUALITY | 60-40                | 60-40                |   |       |   |   |                 |
| CLEAR APERTURE  | Ø24.00               | Ø24.00               | ALL DIMS IN   | mm    | DWG NO  | 69780   | SHEET<br>1 OF 1 |
| BEVEL           | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED |   |       |   |   |                 |