## NOTES:

1. SUBSTRATE MATERIAL: N-BK7


2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. Rohs Compliant

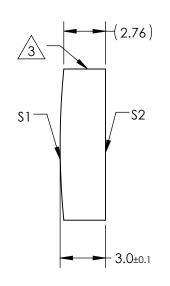

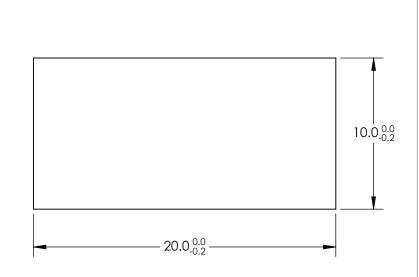

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2				
SHAPE	CONVEX	PLANO	EFL	100		Edmund Ontice
RADIUS	51.63	∞	BFL	97.92		Edmund Optics®
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION		TITLE	10mm H X 20mm L X 100mm FL MgF2 COATED, CYLINDER LENS
CLEAR APERTURE	9.00 X 19.00	9.00 X 19.00				
COATING APERTURE	9.00 X 19.00	9.00 X 19.00				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	47775 SHEE 1 OF