

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: MgF2

R(avg) ≤1.75% @ 400 - 700nm

3. FINE GROUND SURFACE


4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

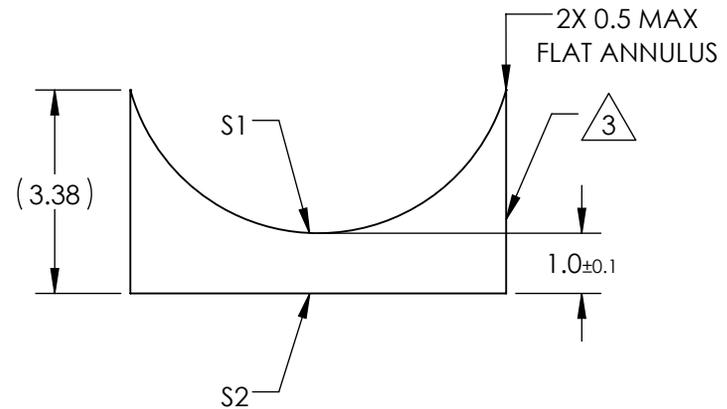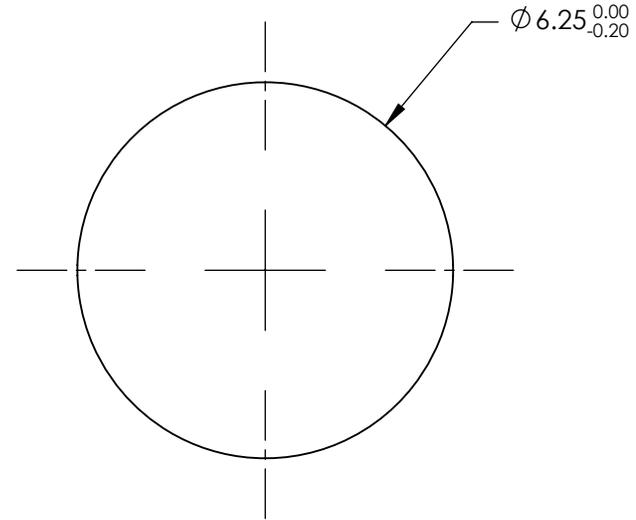

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	-6.25	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	-6.91			
RADIUS	-3.24	∞	THIRD ANGLE PROJECTION 				
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	Ø5.25	Ø5.25	TITLE 6.25mm DIA X -6.25mm FL MgF2 COATED, CYLINDER LENS				
COATING APERTURE	Ø5.25	Ø5.25					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	48371	SHEET 1 OF 1