NOTES:

1. SUBSTRATE MATERIAL: N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: MgF2


R(avg) ≤1.75% @ 400 - 700nm



- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. Rohs Compliant



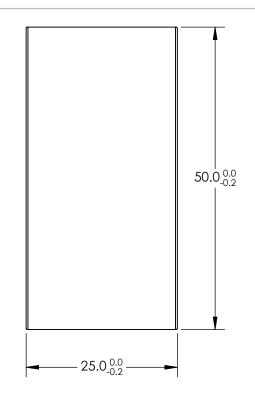

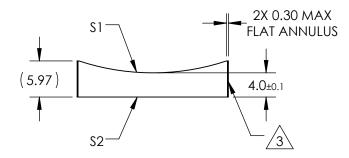

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	-75		Edmund Ontice	·R
RADIUS	-38.8	∞	BFL	-77.6	Ul	Edmund Optics	
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION		TITLE	25mm H X 50mm L X -75mm FL MgF2	
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00				COATED, CYLINDER LENS	
COATING APERTURE	24.00 X 49.00	24.00 X 49.00				·	TEET.
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO		OF 1