
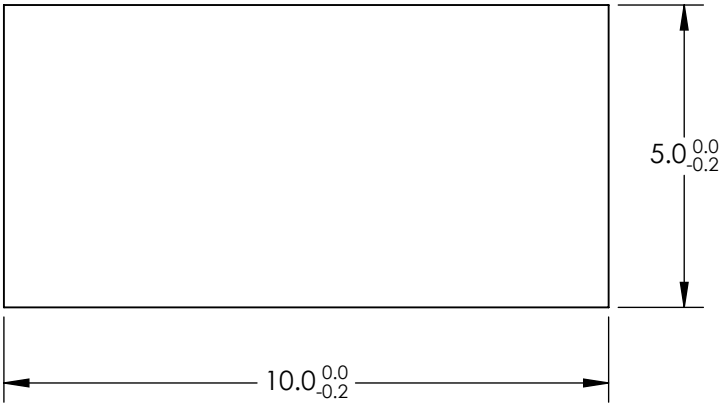



NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: VIS 0°

R(avg) ≤0.4% @ 425 - 675nm
3. FINE GROUND SURFACE
4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

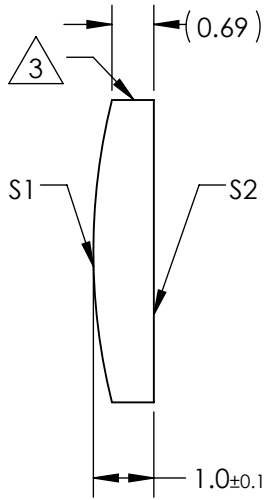

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®				
SHAPE	CONVEX	PLANO					
RADIUS	10.32	∞	EFL	20	BFL	19.34	
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	9.00 X 4.00	9.00 X 4.00					
COATING APERTURE	9.00 X 4.00	9.00 X 4.00	TITLE				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					
			ALL DIMS IN	mm	DWG NO	69693	SHEET 1 OF 1
5mm H X 10mm L X 20mm FL VIS 0° COATED, CYLINDER LENS							