

NOTES:




1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS 0°




R(avg) ≤0.4% @ 425 - 675nm

3. FINE GROUND SURFACE
4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

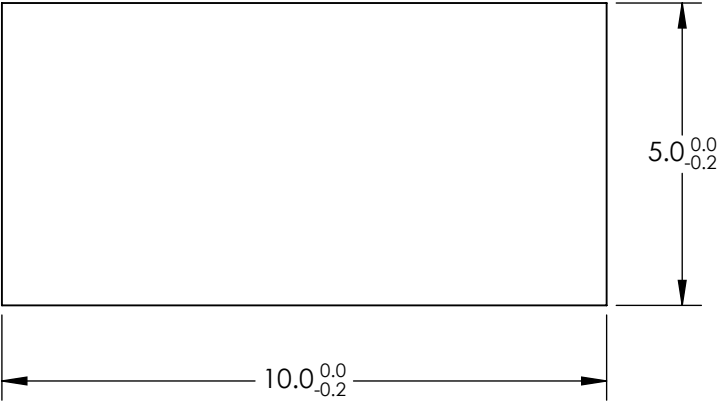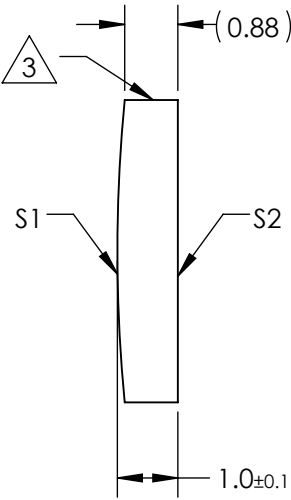

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®						
SHAPE	CONVEX	PLANO						EFL	50
RADIUS	25.8	∞	BFL	49.34					
SURFACE QUALITY	60-40	60-40							
CLEAR APERTURE	9.00 X 4.00	9.00 X 4.00			TITLE	5mm H X 10mm L X 50mm FL VIS 0° COATED, CYLINDER LENS			
COATING APERTURE	9.00 X 4.00	9.00 X 4.00							
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69695		SHEET 1 OF 1	