
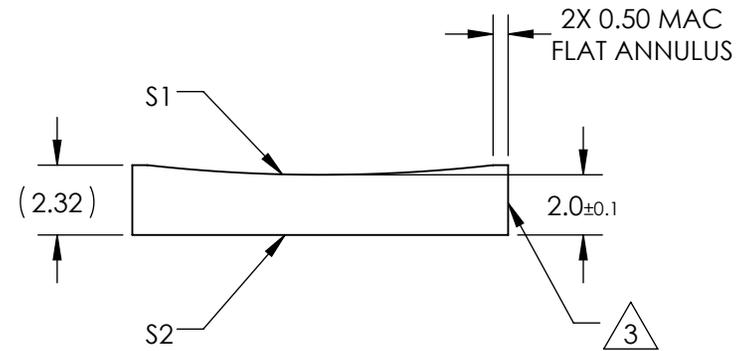


NOTES:

1. SUBSTRATE MATERIAL:  
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)  
  
S1 & S2: MgF2  
  
R(avg) ≤1.75% @ 400 - 700nm

3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

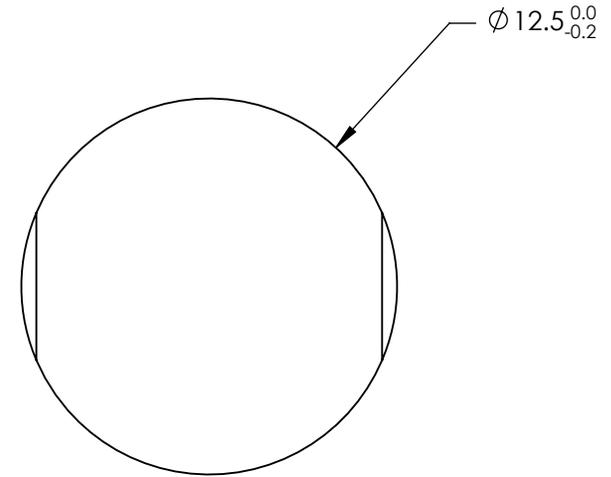

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	-100		<b>Edmund Optics®</b>	
RADIUS	-51.68	∞	BFL	-101.32			
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION		TITLE	12.5mm DIA X -100mm FL MgF2 COATED, CYLINDER LENS	
CLEAR APERTURE	Ø11.50	Ø11.50			ALL DIMS IN	mm	DWG NO
COATING APERTURE	Ø11.50	Ø11.50					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					