



NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: NIR I



R(avg) $\leq 0.5\%$ @ 600 - 1050nm

3. FINE GROUND SURFACE
4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
5. RoHS COMPLIANT

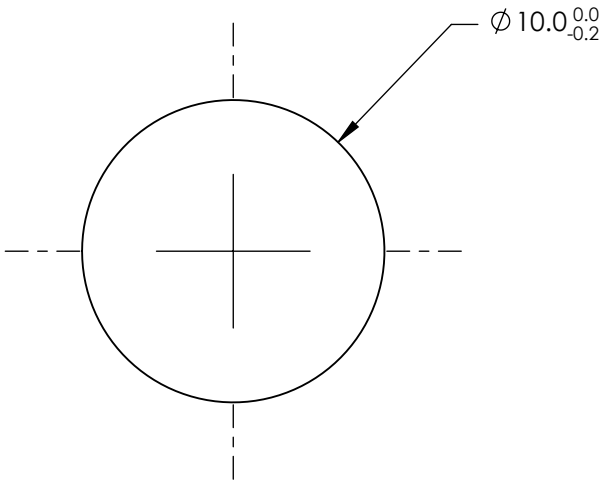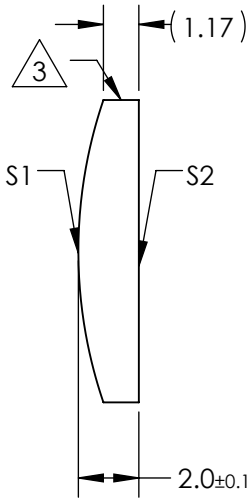

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®				
SHAPE	CONVEX	PLANO					
RADIUS	15.5	∞	EFL	30			
SURFACE QUALITY	60-40	60-40	BFL	28.67			
CLEAR APERTURE	Ø9.00	Ø9.00	THIRD ANGLE PROJECTION		TITLE	10mm DIA X 30mm FL NIR I COATED, CYLINDER LENS	
COATING APERTURE	Ø9.00	Ø9.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69708	SHEET 1 OF 1