## NOTES:

1. SUBSTRATE MATERIAL:

N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR

R(abs) ≤0.25% @ 880nm


R(avg) ≤1.25% @ 400 - 870nm


R(avg) ≤1.25% @ 890 - 1000nm

3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE

5. Rohs Compliant

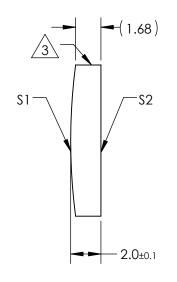

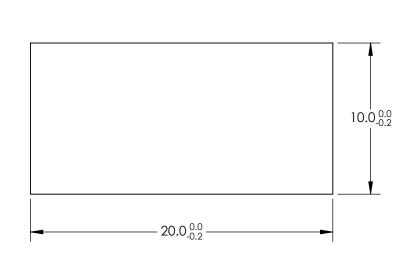

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

> SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2				
SHAPE	CONVEX	PLANO	EFL	75		Edmund Ontion
RADIUS	38.72	∞	BFL	73.72		Edmund Optics®
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION		TITLE	10mm H X 20mm L X 75mm FL VIS-NIR COATED, CYLINDER LENS
CLEAR APERTURE	9.00 X 19.00	9.00 X 19.00				
COATING APERTURE	9.00 X 19.00	9.00 X 19.00		 		·
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	47968 SHEET 1 OF 1