

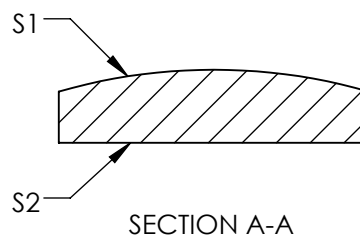


NOTES:

1. SUBSTRATE MATERIAL:
FUSED SILICA
2. CENTERING TOLERANCE (AT 587.6nm):
PLANO AXIS WEDGE: < 3 ARCMIN
POWER ASIX WEDGE: < 3 ARCMIN
AXIAL TWIST: < 3 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)

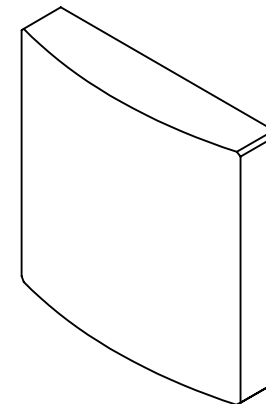

S1 & S2: $R(AVG) \leq 0.4\%$ FROM 425-675nm @ 0° AOI
4. FINE GROUND SURFACE
5. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
6. ROHS COMPLIANT

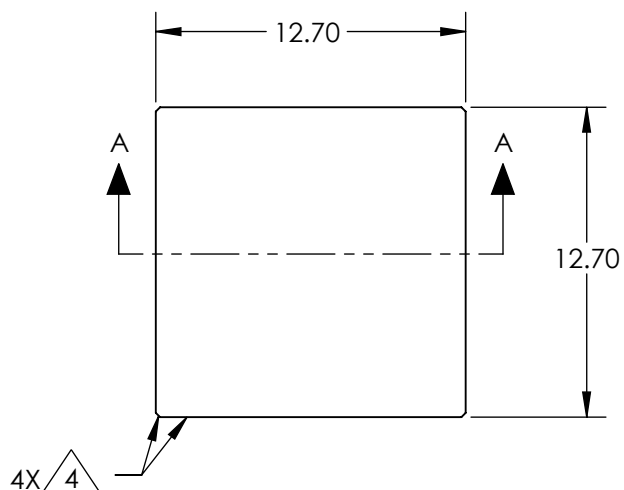

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2			 Edmund Optics®		
SHAPE	CONVEX	PLANO	<div>THIRD ANGLE PROJECTION</div> 		TITLE	LENS CYL SHAPING 12.7mm SQ x 50mm VIS 0	
SURFACE QUALITY	20 - 10	20 - 10					
CLEAR APERTURE	11.43 x 11.43	11.43 x 11.43					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	36089	SHEET 1 OF 1