

## NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE): S1: BARE ALUMINUM S2: NONE
- 3. WAVELENGTH RANGE: 250-400nm ABSOLUTE DIFFRACTION EFFICIENCY: 45-65% GROOVE DENSITY: 1800 grooves/mm



5. Rohs Compliant



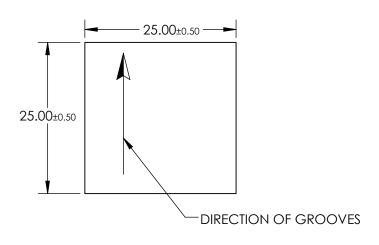



## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

	\$1	\$2	
SHAPE	PLANO	PLANO	
CLEAR APERTURE	22.5 x 22.5	N/A	
•			

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

<b>Edmund Optics</b>
----------------------

THIRD ANGLE PROJECTION	$\phi \lhd$	TITLE	GRATING HOLO 1800GR UV 25 X 2	5
ALL DIMS IN	mm	DWG NO	43219	SHEET 1 OF 1