
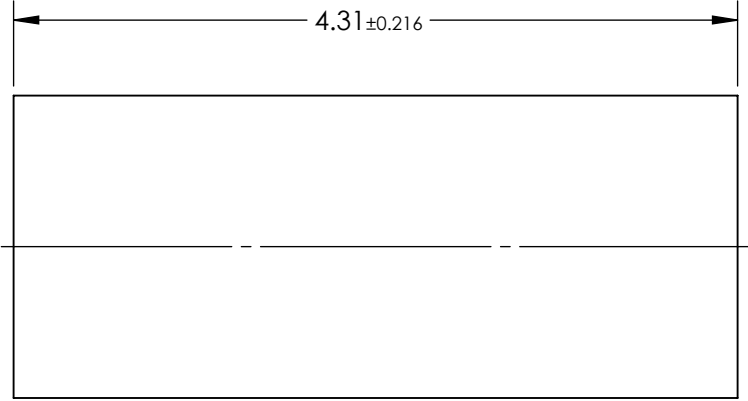


NOTES:

- 1. SUBSTRATE:  
Alumoscilate Glass Embedded with Silver Ions
- 2. COATING (APPLY ACROSS COATING APERTURE)  
S1 & S2: BBAR (640-700nm)  
R(AVG) < 0.5% @ 670nm ±30nm
- 3. EFL: 1.69
- 4. f/# : 0.94
- 5. NUMERICAL APERTURE: 0.52
- 6. DESIGN WAVELENGTH: 670nm
- 7. WORKING DISTANCE:0mm
- 8. ROHS: COMPLIANT

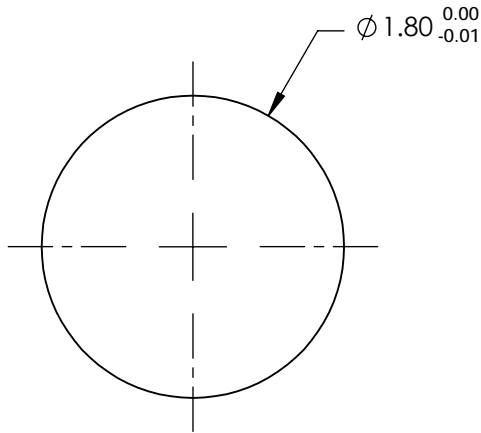

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® **Edmund Optics®**

	S1	S2				
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION		TITLE	1.8mm Dia, 670nm DWL, 0.0mm WD, VIS Coated, GRIN Lens
SURFACE QUALITY	40-20	40-20			DWG NO	64537
CLEAR APERTURE	Ø1.62	Ø1.62				
			ALL DIMS IN	mm		SHEET 1 OF 1