
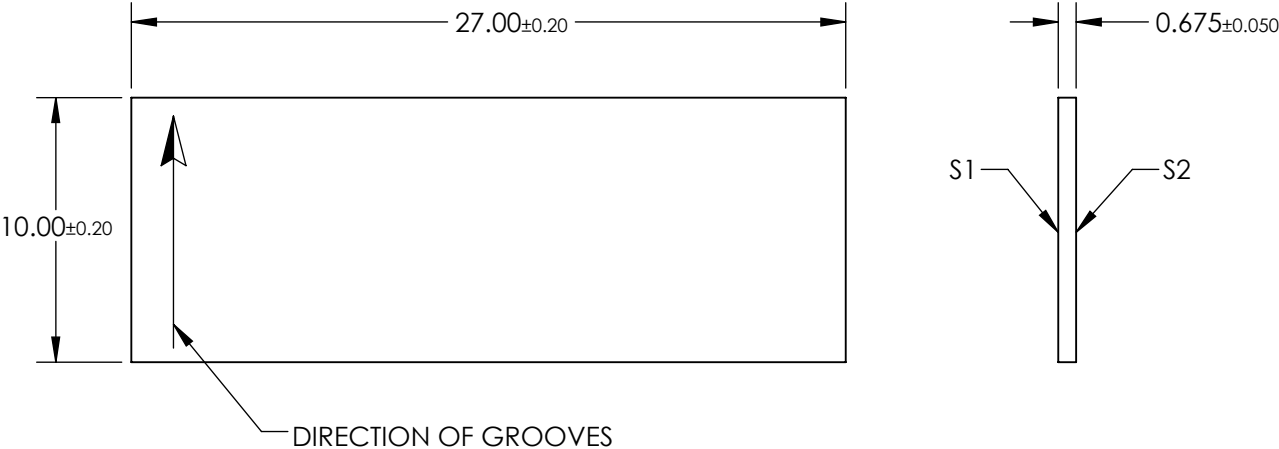




NOTES:

- 1. SUBSTRATE MATERIAL:
FUSED SILICA
- 2. COATING:
S1: SURFACE ETCHED MULTI-LAYER DIELECTRIC GRATING
S2: ANTI-REFLECTION (AR)
- 3. WAVELENGTH RANGE: 1528 - 1610nm
ANGLE OF INCIDENCE: 48.4 ±1°
GROOVE DENSITY: 940.07 GROOVES/mm
GROOVE UNIFORMITY: 0.001 GROOVES/mm
- 4. RoHS COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO		TITLE		
SURFACE QUALITY	60-40	60-40		II-VI LightSmyth™ 1528 - 1610nm, 940.07 Grooves/mm, 27 x 10mm Transmission Diffraction Grating		
CLEAR APERTURE	26.00 x 9.00	26.00 x 9.00		DWG NO		
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED		16877		
ALL DIMS IN			mm	SHEET 1 OF 1		