NOTES:

1. SUBSTRATE:

NITROCELLULOSE


2. COATING (APPLY ACROSS CLEAR APERTURE)


S1: DIELECTRIC

45% R @ 3000-5000nm @ 45° AOI 55% T @ 3000-5000nm @ 45° AOI

S2: NONE



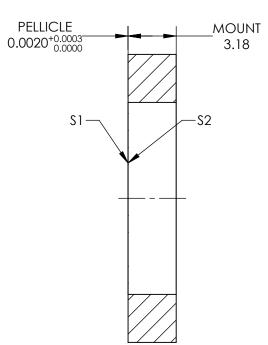

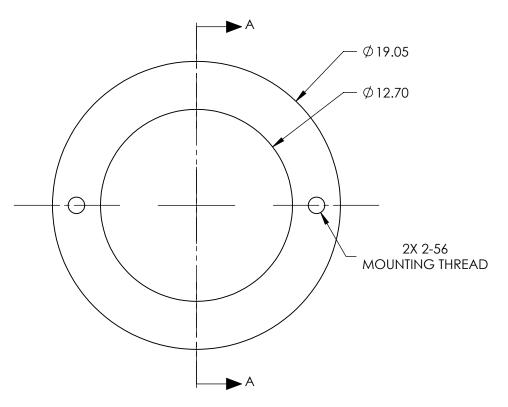

SECTION A-A

PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| | \$1 | \$2 |
|-----------------|---------------------|---------------------|
| SHAPE | PLANO | PLANO |
| SURFACE QUALITY | 40-21 | 40-21 |
| CLEAR APERTURE | Ø 12.7 | Ø12.7 |
| BEVEL | PROTECTED AS NEEDED | PROTECTED AS NEEDED |

| | | | Edmund Optics ® | | |
|------------------------|--------|--------|---|---------------|--|
| THIRD ANGLE PROJECTION | ϕ | TITLE | 12.7mm Clear Aperture 45R/55T, Infra Pellicle Beamsplitter | ıred | |
| ALL DIMS IN | mm | DWG NO | 19280 | SHEET 1 OF | |

SHEET 1 OF 1