


NOTES:

1. SUBSTRATE: N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)
- S1: NONE
S2: NONE
- 3.FINE GRIND SURFACE
4. CENTERING: 3 ARCMIN
5. ASPHERE FIGURE ERROR: 0.25 µm RMS

6. ASPHERIC SURFACE DESCRIBED BY (REF. COEFFICIENT TABLE)

$$Z_{ASPH}(Y) = \frac{(1/RADIUS)*Y^2}{1 + \sqrt{1 - (1+k)*(1/RADIUS)^2*Y^2}} + D*Y^2 + E*Y^4 + F*Y^6 + G*Y^8 + H*Y^{10} + J*Y^{12} + L*Y^{14}$$

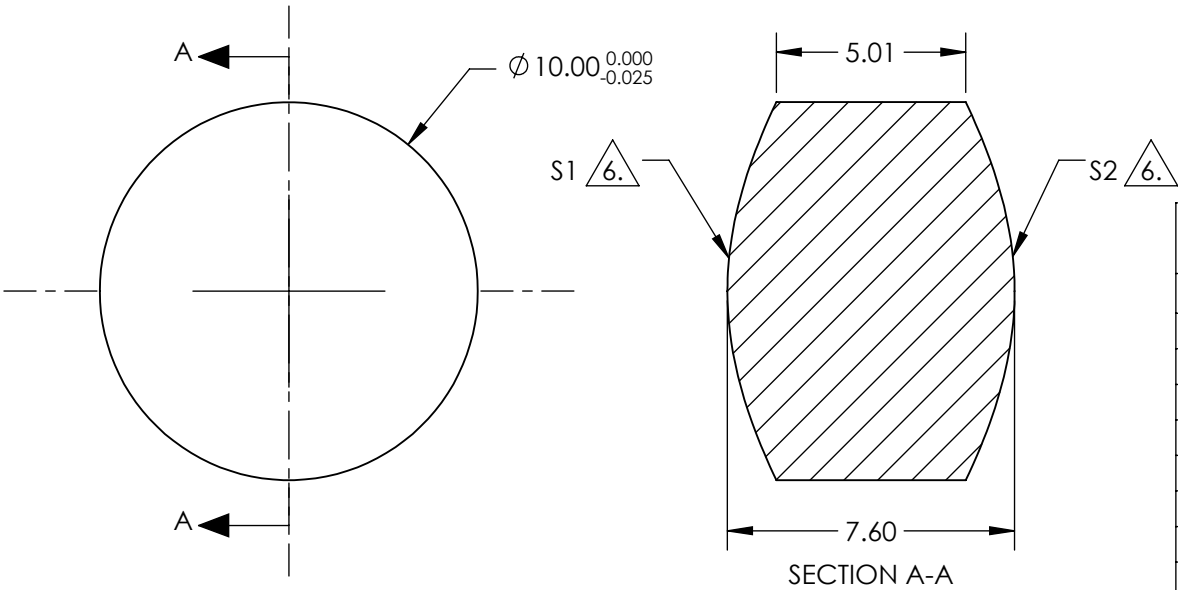

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICEDIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	CONVEX	CONVEX
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø 9.00	Ø 9.00
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

COEFFIECIENT TABLE 6.		
COEFFIECIENT	S1	S2
(1/RADIUS)	1.134044E-01	1.134044E-01
k	-2.300000E+00	-2.300000E+00
D	0.000000E+00	0.000000E+00
E	0.000000E+00	0.000000E+00
F	0.000000E+00	0.000000E+00
G	0.000000E+00	0.000000E+00
H	0.000000E+00	0.000000E+00
J	0.000000E+00	0.000000E+00
L	0.000000E+00	0.000000E+00

Edmund Optics®

THIRD ANGLE PROJECTION	TITLE	10mm Dia. X 10mm FL Uncoated, Double Sided Aspheric Lens
ALL DIMS IN mm	DWG NO	18414
		SHEET 1 OF 1