
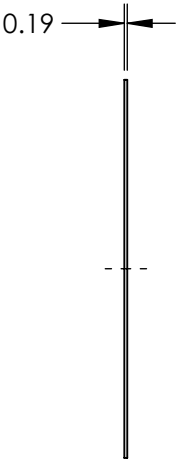
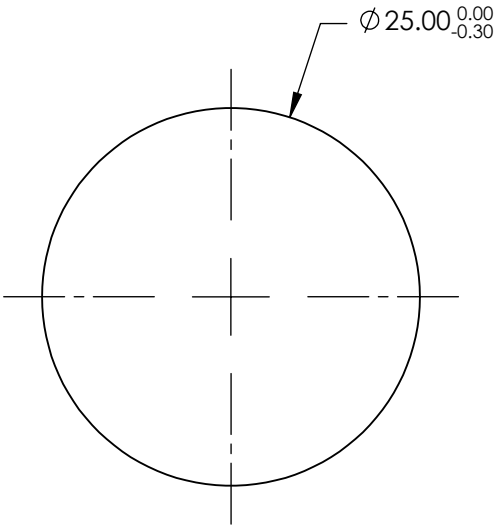


NOTES:


- 1. SUBSTRATE: Aluminum Wires on COP
- 2. EXTINCTION RATIO: >1415:1 (@ 0° AOI, 550nm)
- 3. TRANSMISSION (%): 84.9 (Typical @ 550nm)
- 4. WAVELENGTH RANGE: 400 - 1200 nm
- 5. ORIENTATION OF AXIS: 0° ± 1.5°
NOTCHES ON POLARIZING FILM DEPICT DIRECTION OF POLARIZATION DIRECTION
- 6. RoHS3 COMPLIANT

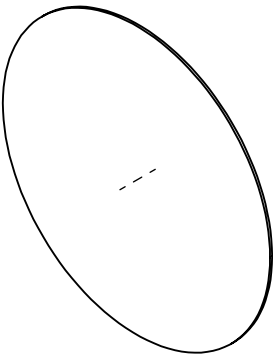

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO[®] Edmund Optics[®]

THIRD ANGLE PROJECTION 		TITLE	25 mm Dia. Stabilized Wire Grid Polarizing Film	
ALL DIMS IN	mm	DWG NO	20234	SHEET 1 OF 1