


TECHSPEC[®] 1050nm 12.5mm Diameter, OD 2.0 Longpass Filter

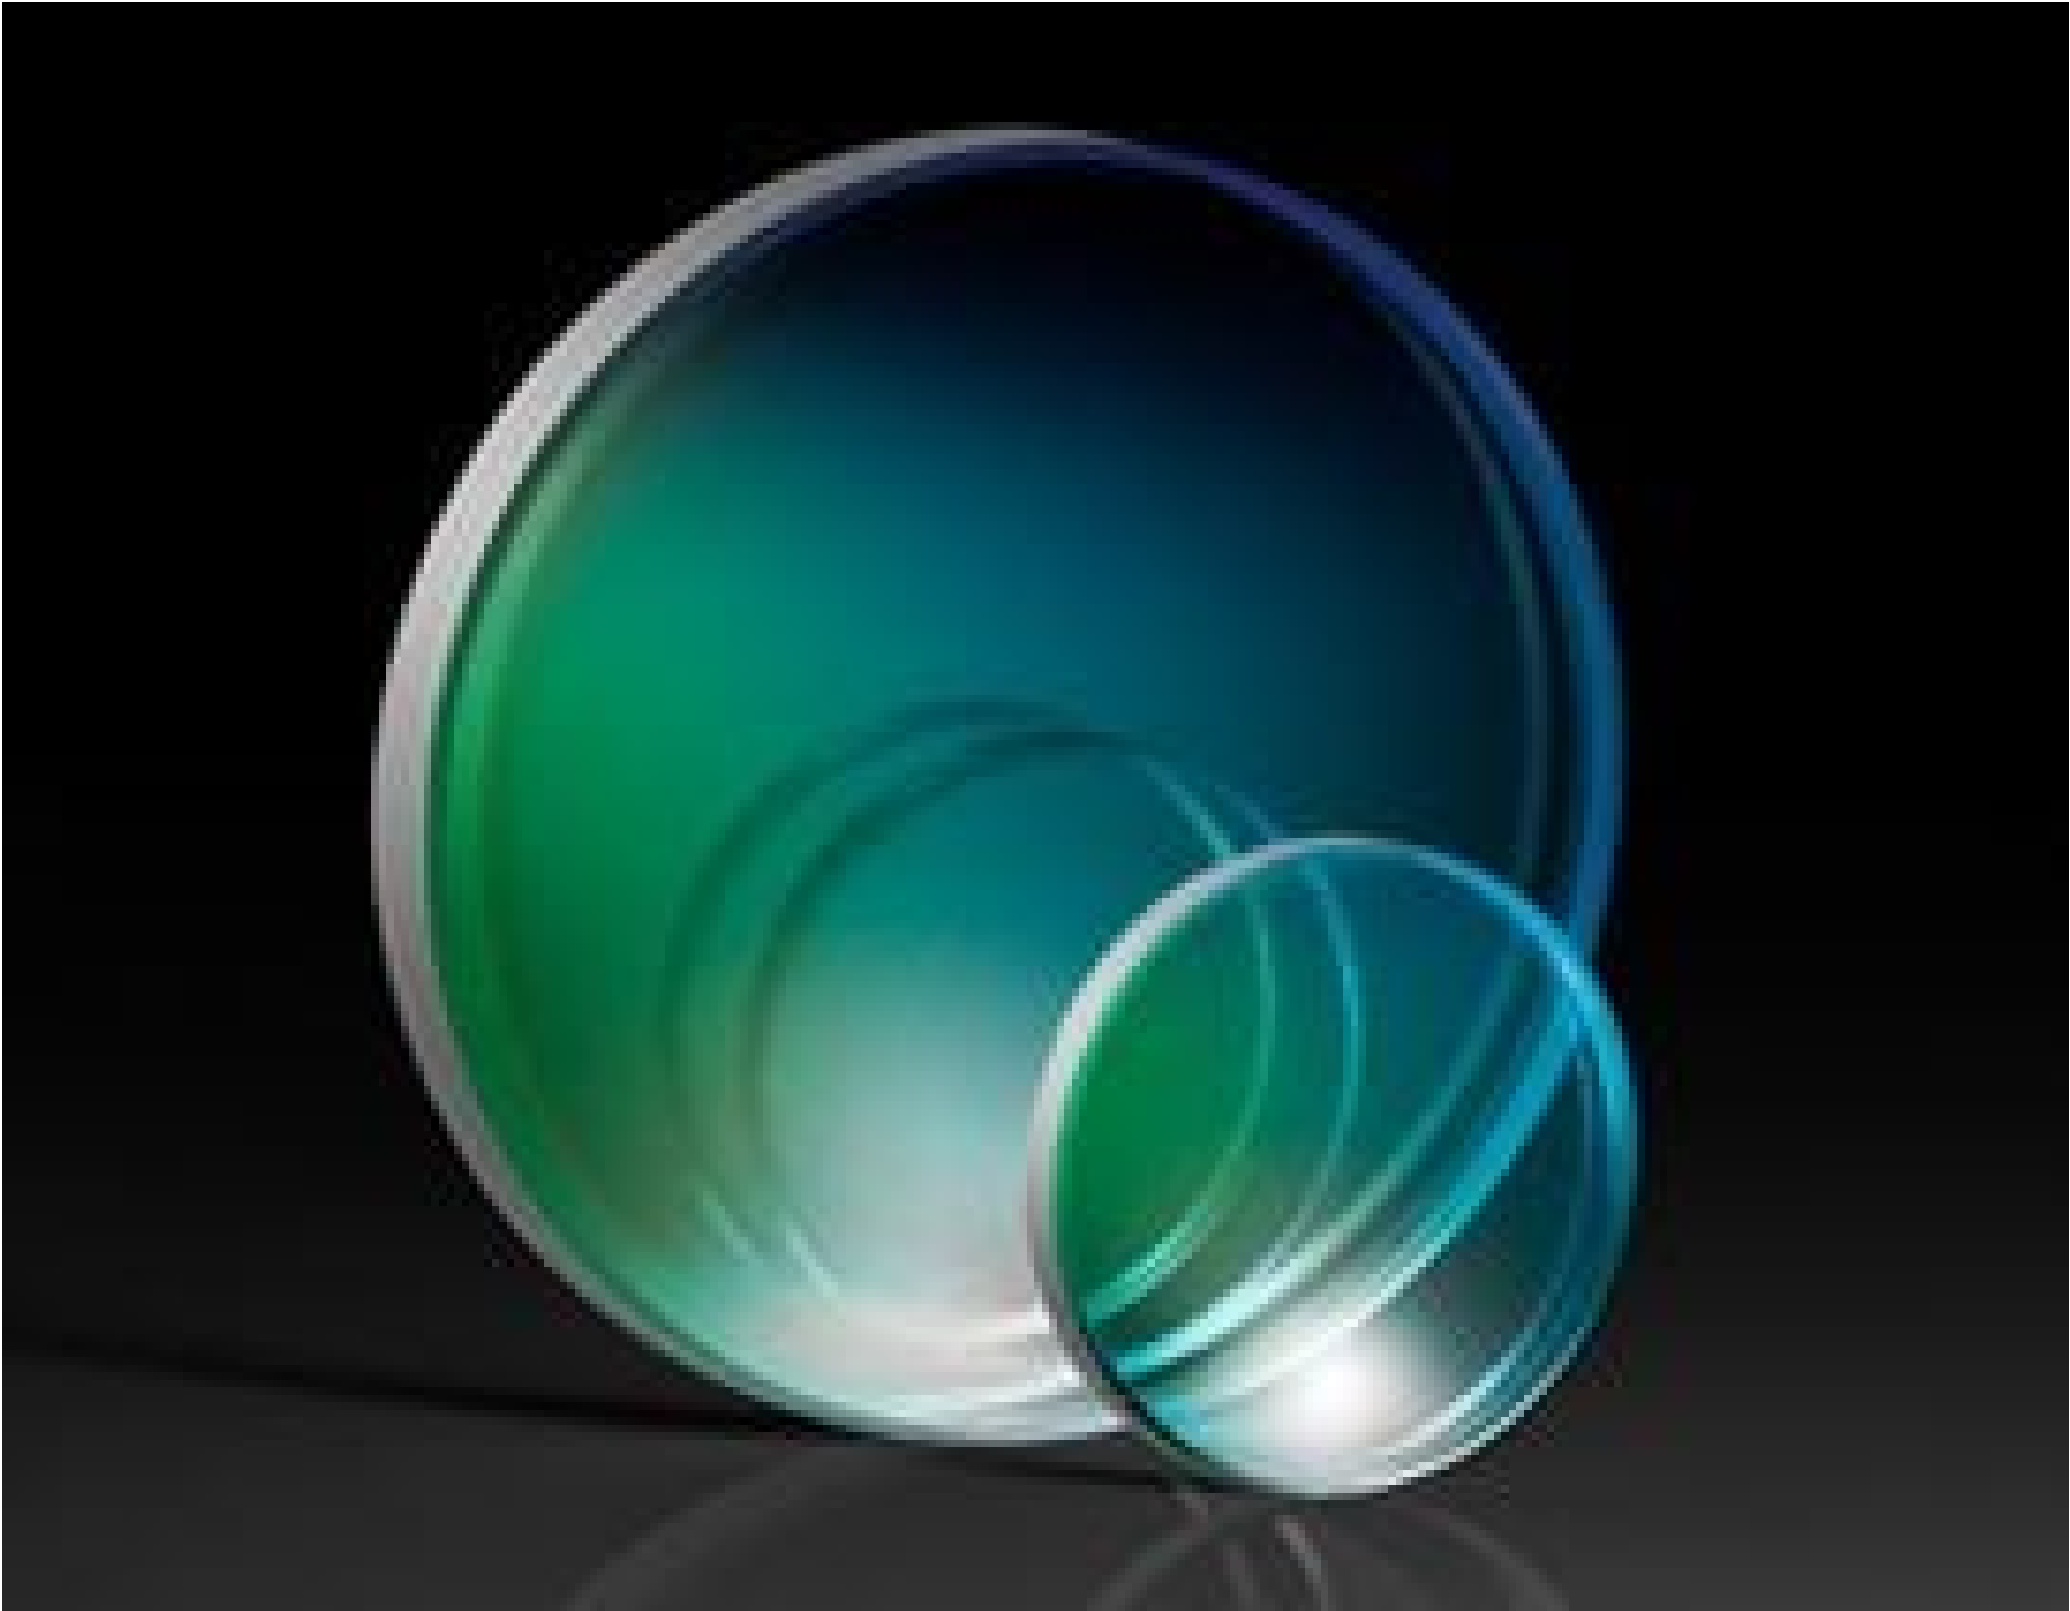

OD 2.0 Longpass Filters

Stock #49-037 CLEARANCE 17 In Stock

-

1

+

S\$126⁰⁰

ADD TO CART

Volume Pricing	
Qty 1-5	S\$126.00 each
Qty 6-25	S\$107.80 each
Qty 26-49	S\$100.80 each
Need More?	Request Quote

Product Downloads

General	
Longpass Filter	Type:
Physical & Mechanical Properties	
12.50 +0.00/-0.20	Diameter (mm):
1.50 ±0.1	Thickness (mm):

80	Clear Aperture (%):
----	---------------------

Optical Properties

0	Angle of Incidence (°):
≥2.0	Optical Density OD (Average):

1,050.00	Cut-On Wavelength (nm):
Fused Silica (Corning 7980)	Substrate: ☐

Traditional Coated	Coating:
790 - 1000	Rejection Wavelength (nm):

40-20	Surface Quality:
>85	Transmission (%):

1085 - 2000	Transmission Wavelength (nm):
λ/4	Transmitted Wavefront, P-V:

±2	Cut-On Tolerance (%):
3.00	Slope Factor (%):

Surface 1: Multi-Layer Dielectric Surface 2: MgF ₂	Coating Specification:
790 - 2000	Wavelength Range (nm):

Regulatory Compliance

Compliant	RoHS 2015:
Compliant	Reach 224:

View	Certificate of Conformance:
----------------------	-----------------------------


Product Details

- Sharp Cut-On Wavelength
- High Rejection/Transmission Efficiency
- Precision Fused Silica Substrate
- Variety of [OD 2.0 Longpass Filter Kits](#) are Available

TECHSPEC® OD 2.0 Longpass Filters are designed to have a sharp transition from reflection to transmission, making them ideal for various applications. Available in a variety of cut-on wavelengths, these filters are designed for fluorescence and order sorting applications. These filters feature precision fused silica substrate and high rejection/transmission efficiency. TECHSPEC® OD 2.0 Longpass Filters have a single-layer AR coating on the back surface that enhances the overall efficiency of each filter. Eliminate stray light by creating custom bandpass filters when combined with [TECHSPEC® OD 2.0 Shortpass Filters](#). A single layer AR coating on the back surface enhances the overall efficiency of each filter.

Note: Due to supply chain issues, our kits may be delivered with an alternative packaging solution in place of a wooden box. For any questions, please contact kits@edmundoptics.com.

Technical Information

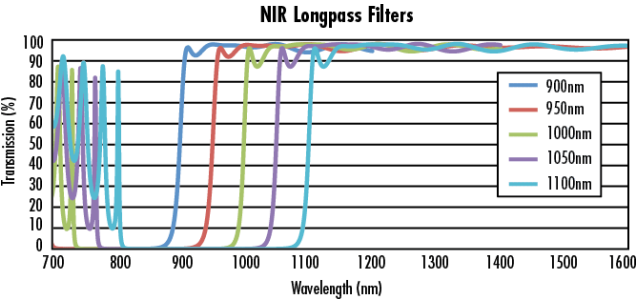

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness

- Tight tolerances and complex geometries
 - Scalable production—from prototype to volume
- Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Compatible Mounts
