

[See all 3 Products in Family](#)

25.4mm Dia., 650 - 1350nm, Complementary Chirped Mirror Pair

See More by [UltraFast Innovations \(UFI\)](#)



UltraFast Innovations (UFI) Ultra-Broadband Complementary Chirped Mirror Pairs

Stock **#14-674** **5 In Stock**

-

1

+

S\$3,416^{.00}

ADD TO CART

Volume Pricing	
Qty 1-4	S\$3,416.00 each
Qty 5-9	S\$3,003.00 each
Qty 10+	S\$2,681.00 each
Need More?	Request Quote

Product Downloads

General

Note:

Sold as a Set of 2

Physical & Mechanical Properties

10 ±5

Wedge Angle (arcmin):

Clear Aperture (%):

80

Back Surface:	
Commercial Polish	
Diameter (mm):	
25.40 +0.00/-0.10	
Thickness (mm):	
6.35 ±0.20	
Bevel:	
Protective as needed	

Optical Properties

Coating Specification: R _{avg} >99% @ 650 - 1350nm (5° AOI, p-polarization)	
GDD Specification: -60fs ² @ 650 - 1350nm (5° AOI, p-polarization)	
Wavelength Range (nm): 650 - 1350	
Irregularity (P-V) @ 632.8nm: λ/10	
Coating Type: Dielectric	
Coating: Complementary Chirped Pair (650-1350nm)	
Angle of Incidence (°): 5	
Substrate: ☐ Fused Silica (Corning 7980)	
Damage Threshold, By Design: ☐ 0.2 J/cm ² @ 800nm, 50fs	

Regulatory Compliance

RoHS 2015:	
Compliant	
Certificate of Conformance:	
View	
Reach 235:	
Compliant	


Product Details

- Ideal for Chirped-Pulse Amplifier Systems and Ultra-Broadband Laser Oscillators
- Ultra-Broadband Design Supports Dispersion Compensation
- Negative GDD as Low as -60fs² and High Reflectivity (>99%) at 600 – 950nm or 650 – 1350nm

UltraFast Innovations (UFI) Ultra-Broadband Complementary Chirped Mirror Pairs are designed to provide dispersion compensation for ultrafast pulses. The matched mirrors feature out-of-phase group delay dispersion (GDD) oscillations leading to a near-constant GDD performance with minimal oscillations. The broadband coating design covers the most common ultrafast laser lines, including Ti:sapphire and Yb:doped fiber, providing negative GDDs as low as -60fs² and average reflectance of >99% (p-polarization) at 600 – 950nm or 650 – 1350nm. The narrow angles of incidence (AOI) allows many reflections of the ultrafast pulse to effectively compensate for dispersion effects. UFI Ultra-Broadband Complementary Chirped Mirror Pairs are ideal for dispersion compensation in ultrafast laser applications, including chirped-pulse amplifier systems and ultra-broadband laser oscillators. Please contact us for custom mirror pairs with different geometries, bandwidths, or spectral specifications.

Note: Complementary Chirped Mirror Pairs are sold in pairs.

Technical Information

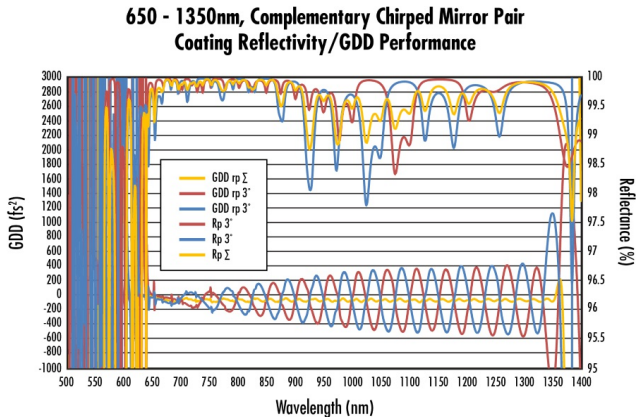

Custom

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness

- Tight tolerances and complex geometries
 - Scalable production—from prototype to volume
- Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).

Compatible Mounts

;