

[See all 21 Products in Family](#)

## 1.05µm, 12.5mm Diameter, Infrared Longpass Filter



Infrared (IR) Longpass Filters

Stock **#33-967** **6 In Stock**

⊖ 1 ⊕ S\$261<sup>00</sup>

**ADD TO CART**

Volume Pricing	
Qty 1-9	S\$261.80 each
Qty 10-25	S\$235.20 each
Qty 26-49	S\$222.60 each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

### General

Longpass Filter **Type:**

Transmission at cut-on wavelength is 5% of peak transmission. **Note:**

### Physical & Mechanical Properties

**Diameter (mm):**

12.50 +0.0/-0.1

Thickness (mm):

1.00 ±0.2

Parallelism (arcmin):

<10

Clear Aperture (%):

90

### Optical Properties

Optical Density OD (Average):

≥3.0

Cut-On Wavelength (nm):

1,050.00

Substrate:

Silicon (Si)

Coating:

Traditional Coated

Surface Quality:

80-50

Transmission (%):

>85 (average)

Transmission Wavelength (nm):

1100 - 2100

Transmission Wavelength (µm):

1.10 - 2.10

Blocking Wavelength Range (nm):

200 - 1050

Slope Factor (%):

<12

Cut-On Wavelength (µm):

1.05 ±0.04

Surface Flatness (P-V):

3 - 5λ

### Environmental & Durability Factors

Operating Temperature (°C):

-62 to +71

### Regulatory Compliance

RoHS 2015:

Compliant

Certificate of Conformance:

[View](#)

REACH 241:

Compliant


## Product Details

- Coated on Silicon or Germanium Substrates
- Ideal for Isolating Broad Spectral Regions
- Durable, First-Surface Coatings

• **Due to material supply chain disruptions with germanium, there may be increased lead times and price changes on our germanium products. For more information, please contact our customer service team.**

Infrared (IR) Longpass Filters provide a sharp cut-off below a particular wavelength. Often used for order sorting, they isolate broad regions of the spectrum, simultaneously providing high transmission of desired energy, and deep rejection of unwanted energy. These filters are constructed of hard, durable first-surface dielectric coatings on optical-quality IR-transmitting substrates. Infrared (IR) Longpass Filters are able to withstand normal cleaning and handling associated with any high-quality optical component because of their make-up. These filters are particularly useful for FTIR spectroscopy and Thermal Imaging Applications. For custom sizes and coating requirements, please contact our [Sales Department](#).

## Technical Information

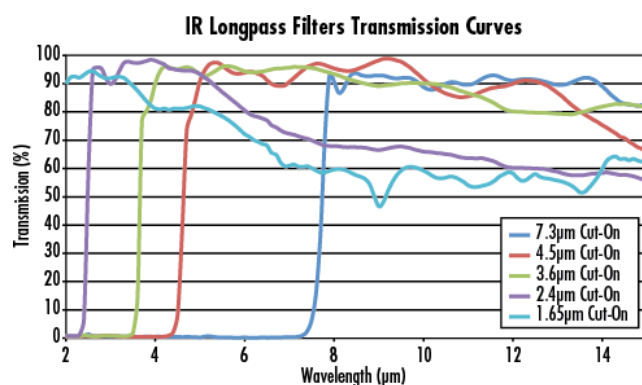

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

## Compatible Mounts

---