

[See all 20 Products in Family](#)

## 1200 Grooves, 25mm Square, 750nm NIR Ruled Grating



Stock #43-848 **5 In Stock**

⊖ 1 ⊕ **\$259<sup>00</sup>**

**ADD TO CART**

Volume Pricing	
Qty 1-9	<b>\$259.00</b> each
Qty 10-24	<b>\$233.10</b> each
Need More?	<a href="#">Request Quote</a>

### Product Downloads

#### General

Reflective Diffraction Grating **Type:**

#### Physical & Mechanical Properties

25.0 x 25.0 ±0.5 **Dimensions (mm):**

90 **Clear Aperture (%):**

Ruled Grating **Construction:**

<b>Direction of Grooves:</b>	
Parallel to Short Dimension	
<b>Length (mm):</b>	
25.00	
<b>Thickness (mm):</b>	
9.50 ±0.5	
<b>Width (mm):</b>	
25.00	
<b>Alignment of Grooves to Edge (°):</b>	
±0.5	

### Optical Properties

<b>Groove Density (grooves/mm):</b>	
1200	
<b>Wavelength Range (nm):</b>	
700 - 3000	
<b>Blaze Wavelength (nm):</b>	
750	
<b>Blaze Angle (°):</b>	
26.73	
<b>Coating:</b>	
Bare Gold	
<b>Substrate:</b> <input type="checkbox"/>	
Float Glass	

### Regulatory Compliance



<b>RoHS 2015:</b>	
<a href="#">Compliant</a>	
<b>Certificate of Conformance:</b>	
<a href="#">View</a>	
<b>Reach 247:</b>	
<a href="#">Compliant</a>	

## Product Details

- Increased Reflection from 700 - 1100nm
- Near-IR (NIR) Reflective Gold Gratings are ruled gold-coated versions of our commercial gratings. These gratings provide increased reflection from 700 - 1100nm. This makes them an excellent choice for applications such as fiber optic pulse compression and spectroscopy setups using [silicon detectors](#). Near-IR (NIR) Reflective Gold Gratings feature a float glass substrate and a ruled grating construction. The gratings are available in three sizes, with varying groove densities and blaze wavelengths.

**Handling Gratings:** Gratings require special handling, making them prone to fingerprints and aerosols. Gratings should only be handled by the edges. Before attempting to clean a grating, please [contact us](#).

## Technical Information

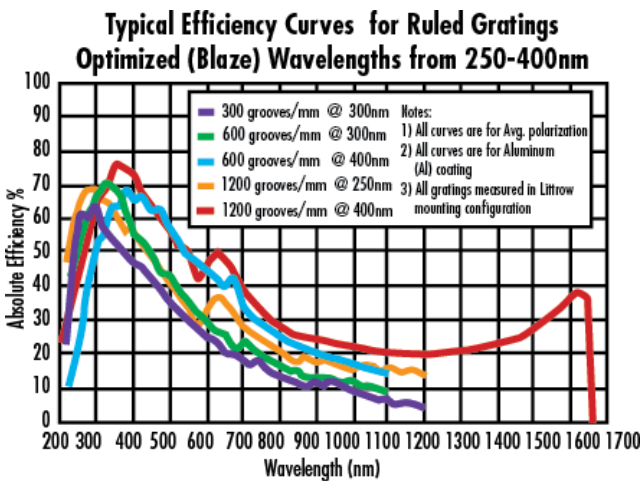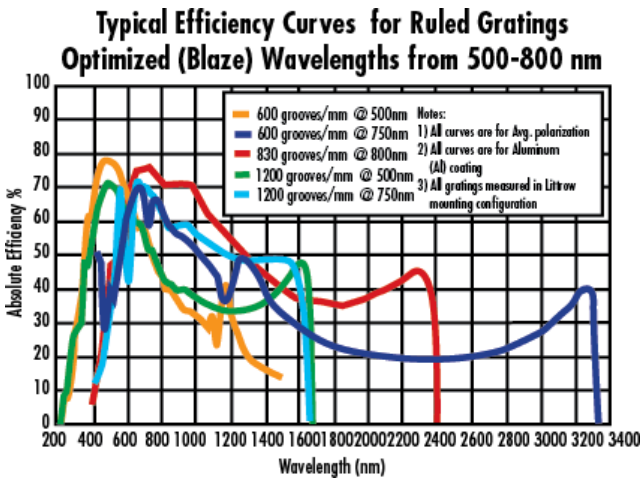

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

---

;