

[See all 7 Products in Family](#)

**TECHSPEC® 25.4mm Dia., 680 - 1020nm, 70R:30T, Ultrafast Beamsplitter**



TECHSPEC® Ultrafast Beamsplitters

Stock **#13-832** **9 In Stock**

⊖ 1 ⊕ **S\$401<sup>00</sup>**

**ADD TO CART**

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-4        | <b>S\$401.80</b> each         |
| Qty 5-9        | <b>S\$352.80</b> each         |
| Qty 10-19      | <b>S\$315.00</b> each         |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

**General**

Ultrafast Non-Polarizing Beamsplitter **Type:**

**Physical & Mechanical Properties**

3.00 ±0.10 **Thickness (mm):**

25.40 +0.00/-0.10 **Diameter (mm):**

80 Clear Aperture (%):

<10 Parallelism (arcsec):

## Optical Properties

**Fused Silica** (Coming 7980) Substrate:

10-5 Surface Quality:

45 Angle of Incidence (°):

680 - 1020 Wavelength Range (nm):

70/30 Reflection/Transmission Ratio (R/T):

Coating Specification:  
Surface 1:  
 $R_{avg} = 70 \pm 3\%$  @ 680 - 1020nm  
 $R_p = 56 \pm 3\%$  @ 680 - 1020nm  
 $R_s = 85 \pm 3\%$  @ 680 - 1020nm  
Surface 2:  
 $R_s < 2\%$  @ 650 - 1100nm  
 $R_p < 1.5\%$  @ 650 - 1100nm

GDD Specification:  
Transmission:  $\pm 15 \text{ fs}^2$  @ 700 - 1080nm  
Reflectivity:  $\pm 20 \text{ fs}^2$  @ 700 - 1080nm

$\lambda/8$  @ 632.8nm Transmitted Wavefront Distortion:

$< \lambda/6$  @ 632.8nm Reflected Wavefront Distortion:

## Regulatory Compliance

[View](#) Certificate of Conformance:


## Product Details

- Designs for Ti:sapphire and Yb:doped Fiber Lasers
- 90:10, 70:30, and 50:50 (R:T) Split Ratios
- Controlled Reflection and Transmission GDD

TECHSPEC® Ultrafast Beamsplitters are designed for use with femtosecond pulsed Ti:sapphire and Yb:doped fiber lasers. Their front surface features a 90:10, 70:30, or 50:50 (R:T) non-polarizing beamsplitter coating while their back surface features an anti-reflective coating to minimize losses due to reflection. Each coating has controlled dispersion to allow for predictable group delay dispersion (GDD) of the transmitted or reflected pulses. TECHSPEC Ultrafast Beamsplitters are available in standard imperial sizes for easy integration into optical systems. Please [contact us](#) if your application requires an Ultrafast Beamsplitter with a custom size or coating specifications.

**Note:** The arrow on the edge of these optics points towards the beamsplitter coating.

## Technical Information

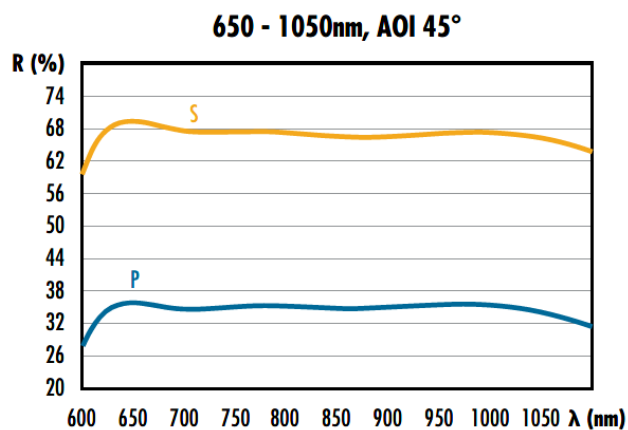

## Compatible Mounts