

**TECHSPEC® 25mm Dia. x 35mm FL Uncoated Calcium Fluoride PCX Lens**



TECHSPEC Calcium Fluoride Plano-Convex (PCX) Lenses

Stock **#88-163** **20+ In Stock**

⊖ 1 ⊕ **\$294<sup>00</sup>**

**ADD TO CART**

Volume Pricing	
Qty 1-5	<b>\$294.00</b> each
Qty 6-25	<b>\$235.20</b> each
Qty 26-49	<b>\$221.20</b> each
Need More?	<a href="#">Request Quote</a>

Product Downloads

**General**

Plano-Convex Lens

Type:

**Physical & Mechanical Properties**

25.00 +0.00/-0.10

Diameter (mm):

<3

Centering (arcmin):

Center Thickness CT (mm):  
7.50 ±0.1

Edge Thickness ET (mm):  
1.59

Clear Aperture CA (mm):  
22.5

Bevel:  
Protective as needed

## Optical Properties

Effective Focal Length EFL (mm):  
35.00 @ 266nm

Back Focal Length BFL (mm):  
29.87

Coating:  
Uncoated

Substrate:   
Calcium Fluoride (CaF<sub>2</sub>)

Surface Quality:  
40-20

Power (P-V) @ 632.8nm:  
λ

Irregularity (P-V) @ 632.8nm:  
λ/2

Radius R<sub>1</sub> (mm):  
16.17

f#:  
1.4

Numerical Aperture NA:  
0.36

Wavelength Range (nm):  
200 - 7000

Axis Orientation:  
Random

## Regulatory Compliance

RoHS 2015:  
[Compliant](#)

Reach 219:  
[Compliant](#)


Certificate of Conformance:  
[View](#)

## Product Details

- Low Index of Refraction
- Vacuum Grade UV Substrate
- Uncoated, VIS-NIR, and NIR II Broadband AR Coating Options

TECHSPEC® Calcium Fluoride Plano-Convex Lenses are ideal for demanding applications that require superior performance from the ultraviolet through the mid-wave infrared spectra. The lenses' low refractive index, high laser damage threshold, and low axial and radial-stress birefringence are highly suitable for use with Excimer lasers or for integration into infrared systems. Additionally, calcium fluoride features low solubility and offers superior hardness to comparable fluoride-based substrates, making these PCX lenses capable of withstanding harsh environments and exposure to the elements. TECHSPEC® Calcium Fluoride Plano-Convex Lenses are offered in 12.5mm, 25mm, and 50mm diameters. The lenses are available uncoated, VIS-NIR, or with NIR II broadband AR coating options.

## Technical Information

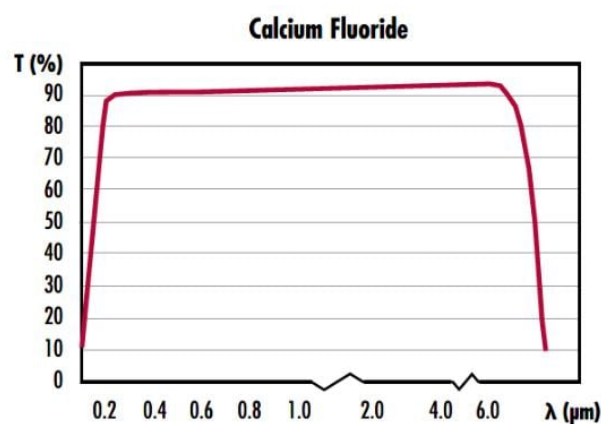

## Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality.

Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

## Compatible Mounts

---