


[See all 1 Products in Family](#)

38.1mm Dia., 6mm Thick, Uncoated, ISP Optics Calcium Fluoride (CaF₂) Window | CF-W-38-6

See More by [ISP Optics](#)

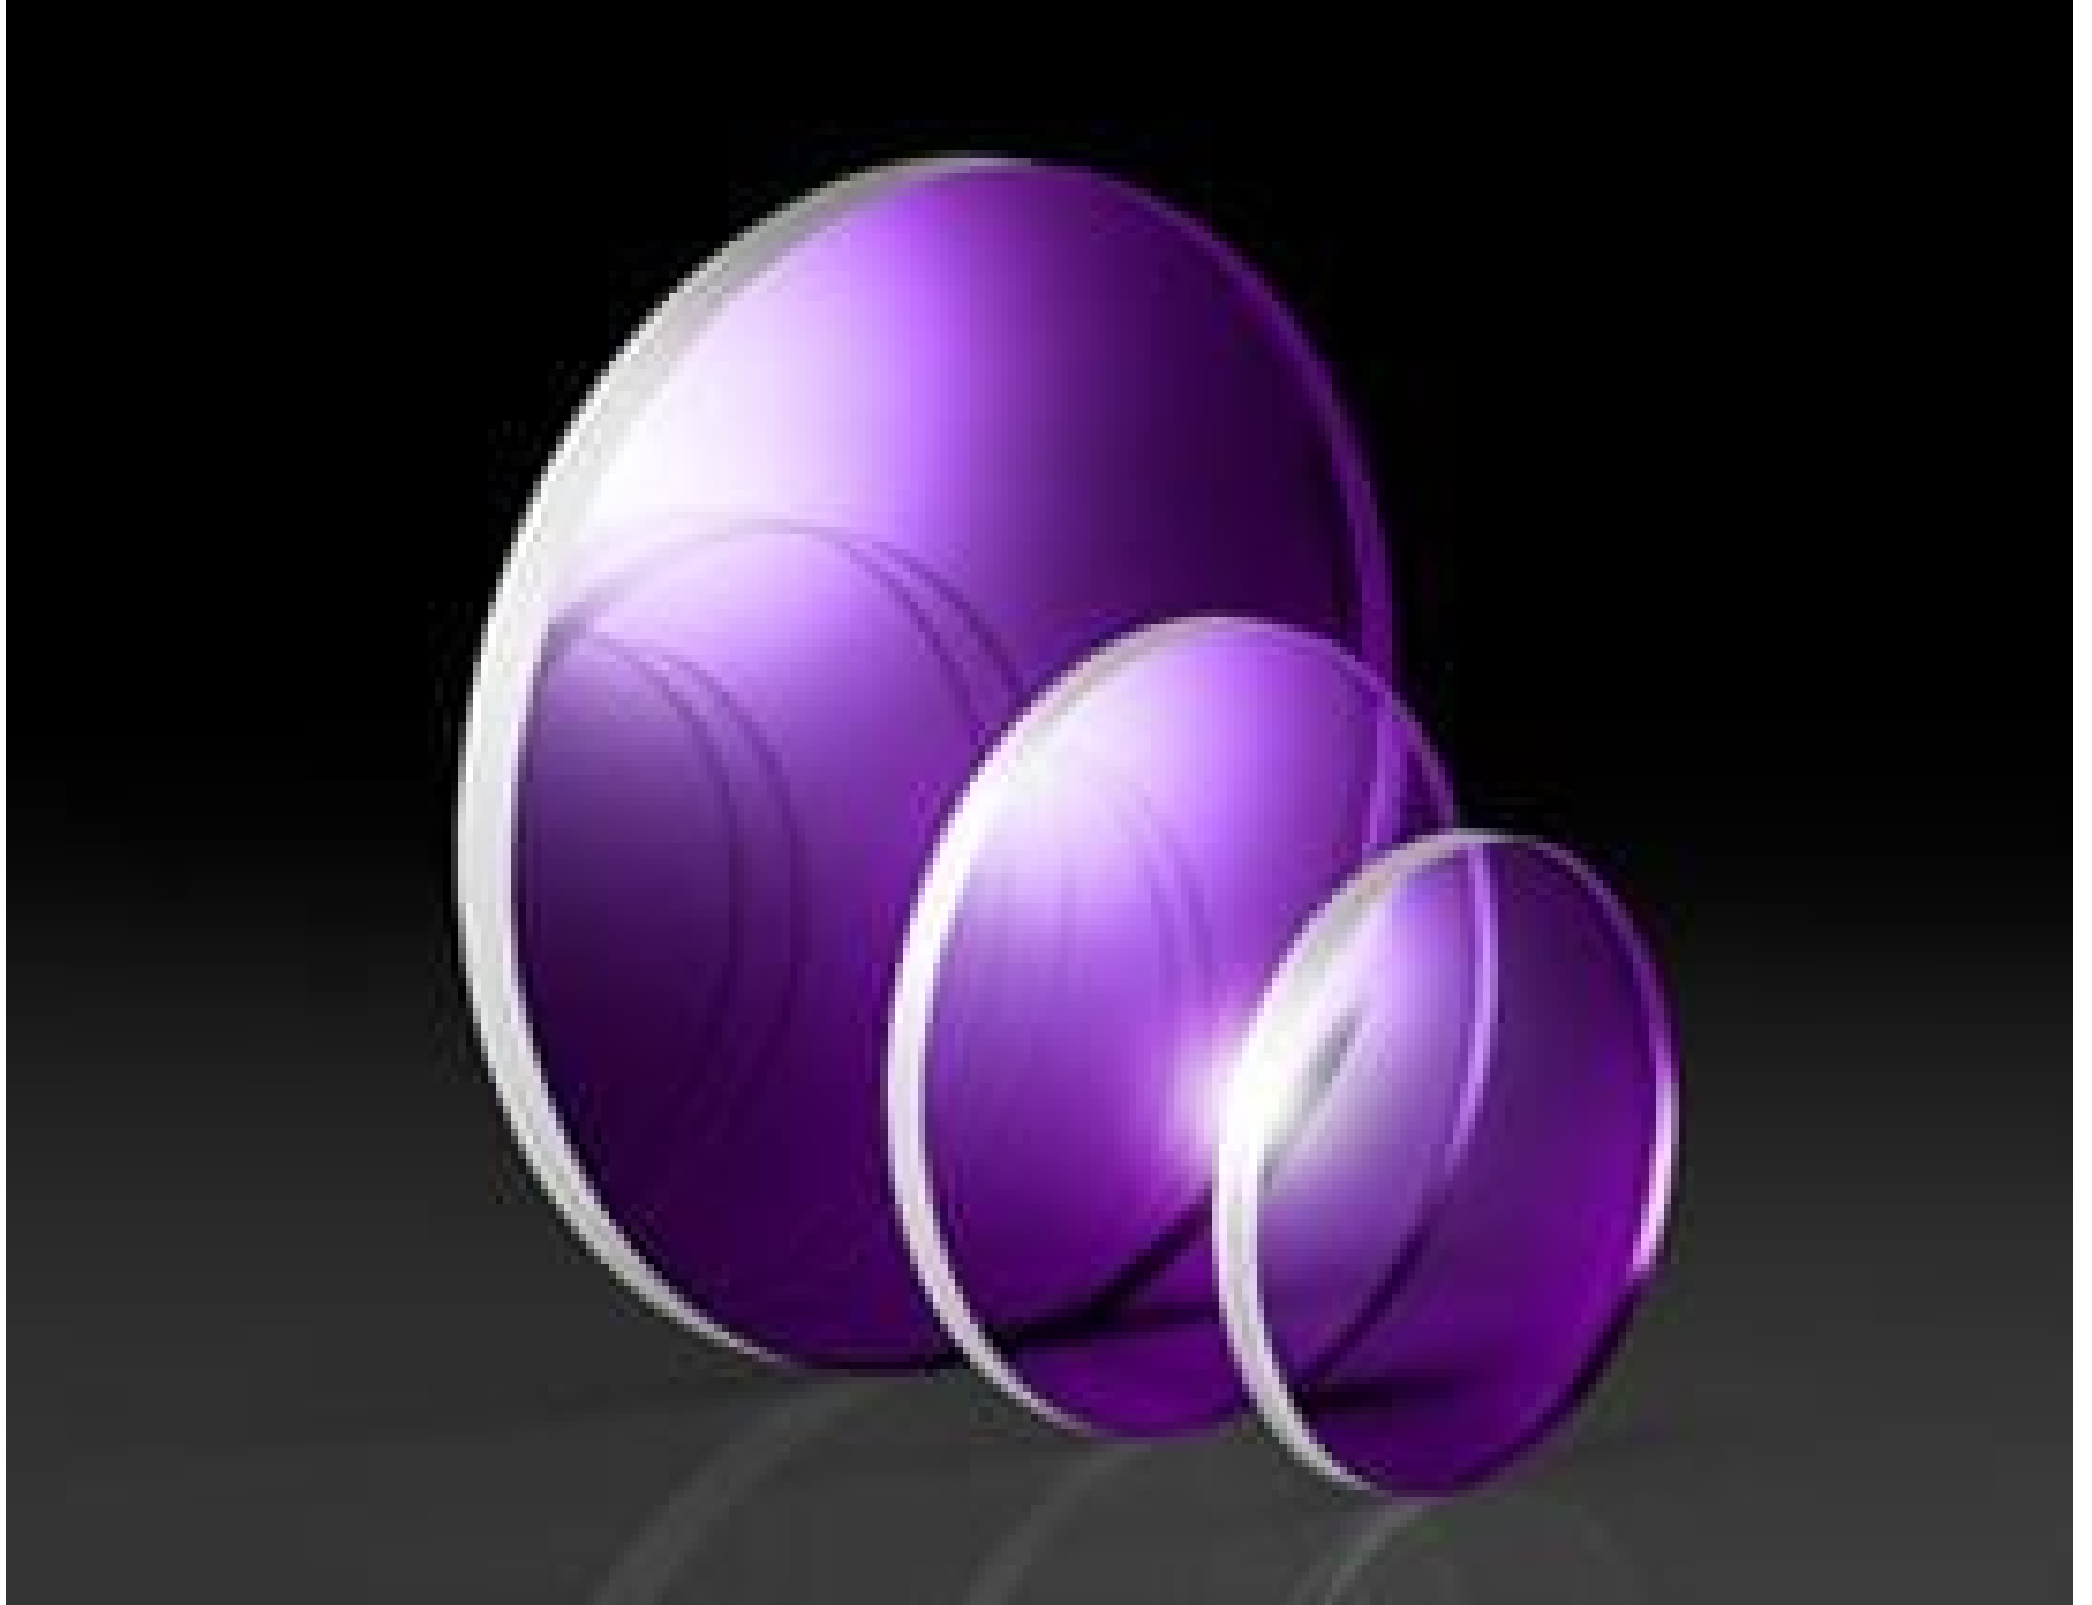

Stock #24-525 **CLEARANCE** 2 In Stock

⊖ 1 ⊕ S\$134²³

ADD TO CART

Volume Pricing	
Qty 1+	S\$134.33 each
Need More?	Request Quote

Product Downloads

General

CF-W-38-6	Model Number:
Protective Window	Type:
Crystal	Type of Window:

Physical & Mechanical Properties

32.38	Clear Aperture CA (mm):
38.10 +0.00/-0.13	Diameter (mm):
6.00 ±0.13	Thickness (mm):
<3	Parallelism (arcmin):
Protective as needed	Bevel:
85	Clear Aperture (%):
Fine Ground	Edges:
0.26	Poisson's Ratio:
75.8	Young's Modulus (GPa):
158.30	Knoop Hardness (kg/mm ²):

Optical Properties

Uncoated	Coating:
Calcium Fluoride (CaF ₂)	Substrate: <input type="checkbox"/>
1.434	Index of Refraction (n _d):
40-20	Surface Quality:
94.99	Abbe Number (v _d):
Random	Axis Orientation:
300 - 8000	Wavelength Range (nm):
2λ	Surface Flatness (P-V):

Material Properties

3.18	Density (g/cm ³):
18.85	Coefficient of Thermal Expansion CTE (10 ⁻⁶ /°C):

Regulatory Compliance

Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 240:

Product Details

- Greater than 90% Transmission from 350nm-7μm
- Low Index of Refraction
- Low Solubility and Chemically Inert

ISP Optics Calcium Fluoride (CaF₂) Windows provide environmental protection for electronic systems and sensors across the IR spectrum. Calcium Fluoride features greater than 90% transmission from 350nm to 7μm and a low refractive index, allowing it to be used without an anti-reflection (AR) coating. These windows are fabricated with IR Grade Calcium Fluoride, featuring low absorption and a high damage threshold in the infrared spectrum. ISP Optics Calcium Fluoride (CaF₂) Windows offer low solubility and superior hardness compared to other fluoride-based substrates, making them ideal for applications featuring harsh environments including infrared spectroscopy systems and thermal imaging.

Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

;