

TECHSPEC<sup>®</sup> 9mm Dia. x 36mm FL , VIS-EXT Coated, Plano-Convex Lens



UV Fused Silica Plano-Convex (PCX) Lenses



Stock #26-320 10 In Stock

-

1

+

S\$206<sup>-10</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-5        | S\$206.10 each                |
| Qty 6-25       | S\$164.29 each                |
| Qty 26-49      | S\$155.32 each                |
| Need More?     | <a href="#">Request Quote</a> |

Product Downloads

SPECIFICATIONS

General

Type:

|                                      |                                          |
|--------------------------------------|------------------------------------------|
| Plano-Convex Lens                    |                                          |
| Physical & Mechanical Properties     |                                          |
| 9.00 +0.0/-0.025                     | Diameter (mm):                           |
| <1                                   | Centering (arcmin):                      |
| 2.00 ±0.05                           | Center Thickness CT (mm):                |
| 1.38                                 | Edge Thickness ET (mm):                  |
| 8.1                                  | Clear Aperture CA (mm):                  |
| Protective as needed                 | Bevel:                                   |
| Optical Properties                   |                                          |
| 36.00 @ 587.6nm                      | Effective Focal Length EFL (mm):         |
| 34.63                                | Back Focal Length BFL (mm):              |
| VS-EXT (350-700nm)                   | Coating:                                 |
| R <sub>avg</sub> <0.5% @ 350 - 700nm | Coating Specification:                   |
| Fused Silica (Corning 7980)          | Substrate: <div></div>                   |
| 40-20                                | Surface Quality:                         |
| 3 Rings                              | Power (P-V) @ 632.8nm:                   |
| 0.5 Rings                            | Irregularity (P-V) @ 632.8nm:            |
| ±1                                   | Focal Length Tolerance (%):              |
| 16.51                                | Radius R <sub>1</sub> (mm):              |
| 4                                    | f/#:                                     |
| 0.13                                 | Numerical Aperture NA:                   |
| 350 - 700                            | Wavelength Range (nm):                   |
| 5 J/cm <sup>2</sup> @ 532nm, 10ns    | Damage Threshold, By Design: <div></div> |
| Regulatory Compliance                |                                          |
| Compliant                            | RoHS 2015:                               |
| View                                 | Certificate of Conformance:              |
| Compliant                            | Reach 235:                               |

## PRODUCT DETAILS

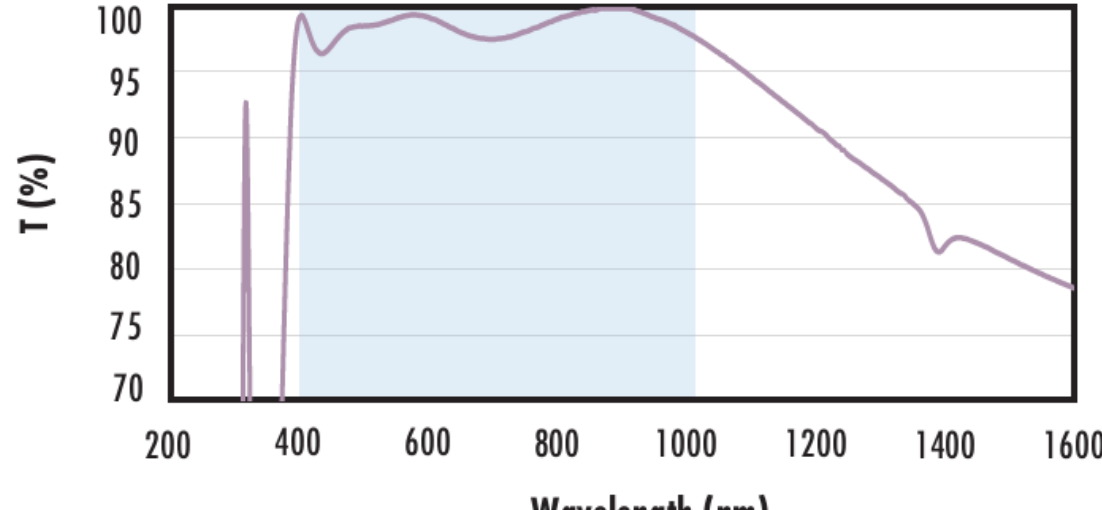
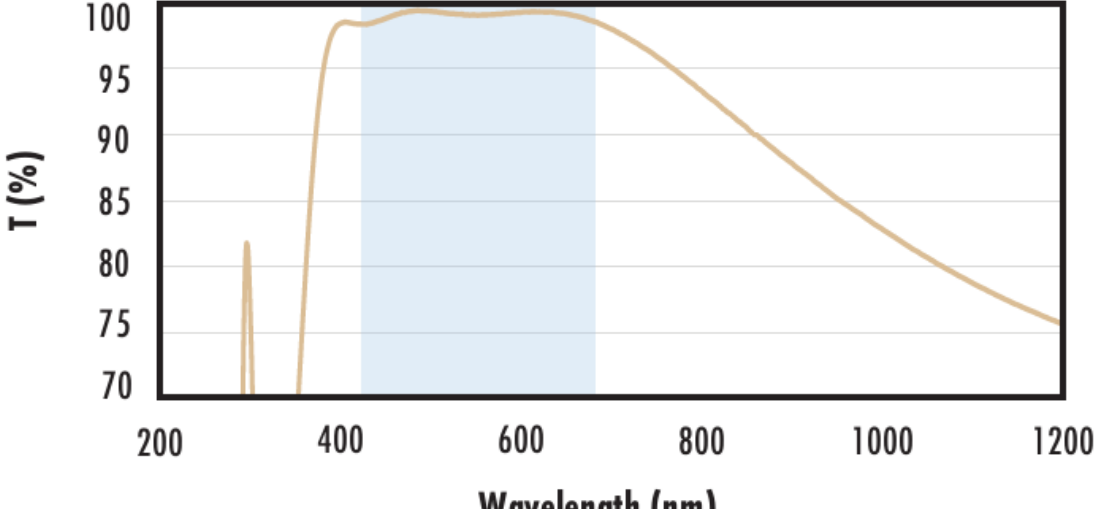
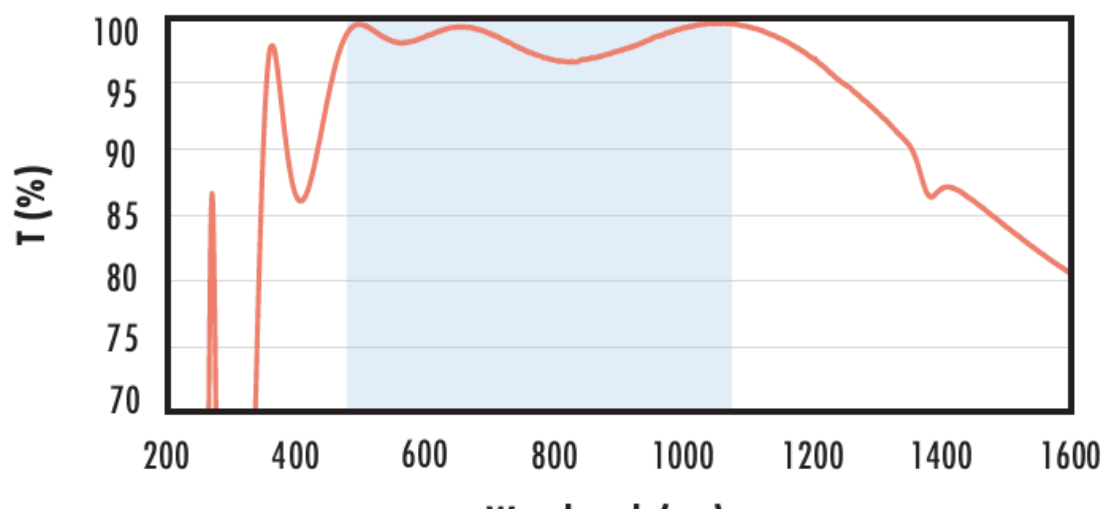
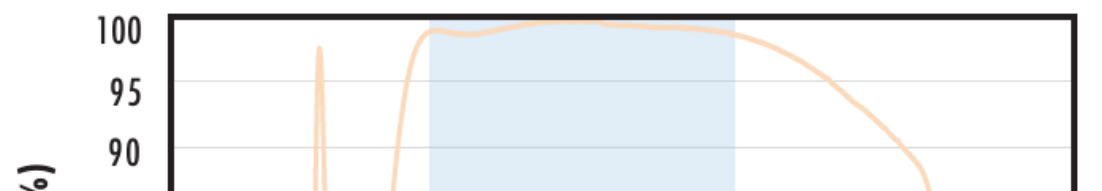
- AR Coated to Provide <0.5% Reflection per Surface for 350 - 700nm
- Precision Fused Silica Substrate
- Various Coating Options: [Uncoated](#), [MgF<sub>2</sub>](#), [UV-AR](#), [UV-VIS](#), [VIS-NIR](#), [VIS 0°](#), [YAG-BBAR](#), [NIR I](#), and [NIR II](#)


TECHSPEC® UV Fused Silica Plano-Convex (PCX) Lenses VS-EXT Coated feature precision specifications and a [variety of coating options](#) on a broadband substrate. Fused Silica is commonly used in applications from the Ultraviolet (UV) through the Near-Infrared (NIR). Its low index of refraction, low coefficient of thermal expansion, and low inclusion content make it ideal for laser applications and harsh environmental conditions. TECHSPEC® UV Fused Silica Plano-Convex (PCX) Lenses VS-EXT Coated feature industry leading diameter and centration specifications, making them ideal for integration into demanding imaging and targeting applications. These lenses are VS-EXT coated to increase their coating performance in the visible region.

## TECHNICAL INFORMATION

| FUSED SILICA                                  |  |
|-----------------------------------------------|--|
| Uncoated Fused Silica<br>Typical Transmission |  |


|                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Typical Transmission</b></p>                                                 | <p>Typical transmission of a 3mm thick, uncoated fused silica window across the UV - NIR spectra.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                                                                                                                                                                                                                                                                              |
| <p><b>Fused Silica with MgF<sub>2</sub> Coating<br/>Typical Transmission</b></p>  | <p>Typical transmission of a 3mm thick fused silica window with MgF<sub>2</sub> (400-700nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 1.75\% @ 400 - 700\text{nm}</math> (N-BK7)</p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                 |
| <p><b>Fused Silica with UV-AR Coating<br/>Typical Transmission</b></p>           | <p>Typical transmission of a 3mm thick fused silica window with UV-AR (250-425nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 1.0\% @ 250 - 425\text{nm}</math><br/><math>R_{avg} \leq 0.75\% @ 250 - 425\text{nm}</math><br/><math>R_{avg} \leq 0.5\% @ 370 - 420\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p> |
| <p><b>Fused Silica with UV-VIS Coating<br/>Typical Transmission</b></p>          | <p>Typical transmission of a 3mm thick fused silica window with UV-VIS (250-700nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 1.0\% @ 350 - 450\text{nm}</math><br/><math>R_{avg} \leq 1.5\% @ 250 - 700\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                          |
| <p><b>Fused Silica with VIS-EXT Coating<br/>Typical Transmission</b></p>         | <p>Typical transmission of a 3mm thick fused silica window with VIS-EXT coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 1.0\% @ 400 - 700\text{nm}</math><br/><math>R_{avg} \leq 1.5\% @ 400 - 700\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                     |

|                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                      | <p>Typical transmission of a 3mm thick fused silica window with VIS-EXT (350-700nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.5\% @ 350 - 700\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                  |
| <p><b>Fused Silica with VIS-NIR Coating</b><br/><b>Typical Transmission</b></p>    | <p>Typical transmission of a 3mm thick fused silica window with VIS-NIR (400-1000nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 0.25\% @ 880\text{nm}</math><br/><math>R_{avg} \leq 1.25\% @ 400 - 870\text{nm}</math><br/><math>R_{avg} \leq 1.25\% @ 890 - 1000\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p> |
| <p><b>Fused Silica with VIS 0° Coating</b><br/><b>Typical Transmission</b></p>    | <p>Typical transmission of a 3mm thick fused silica window with VIS 0° (425-675nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.4\% @ 425 - 675\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>                                                                                                                   |
| <p><b>Fused Silica with YAG-BBAR Coating</b><br/><b>Typical Transmission</b></p>  | <p>Typical transmission of a 3mm thick fused silica window with YAG-BBAR (500-1100nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{abs} \leq 0.25\% @ 532\text{nm}</math><br/><math>R_{abs} \leq 0.25\% @ 1064\text{nm}</math><br/><math>R_{avg} \leq 1.0\% @ 500 - 1100\text{nm}</math></p> <p>Data outside this range is not guaranteed and is for reference only.</p> <p><a href="#">Click Here to Download Data</a></p>      |
| <p><b>Fused Silica with NIR I Coating</b><br/><b>Typical Transmission</b></p>     | <p>Typical transmission of a 3mm thick fused silica window with NIR I (600 - 1050nm) coating at 0° AOI.</p> <p>The blue shaded region indicates the coating design wavelength range, with the following specification:</p> <p><math>R_{avg} \leq 0.5\% @ 600 - 1050\text{nm}</math></p>                                                                                                                                                                                                                                               |

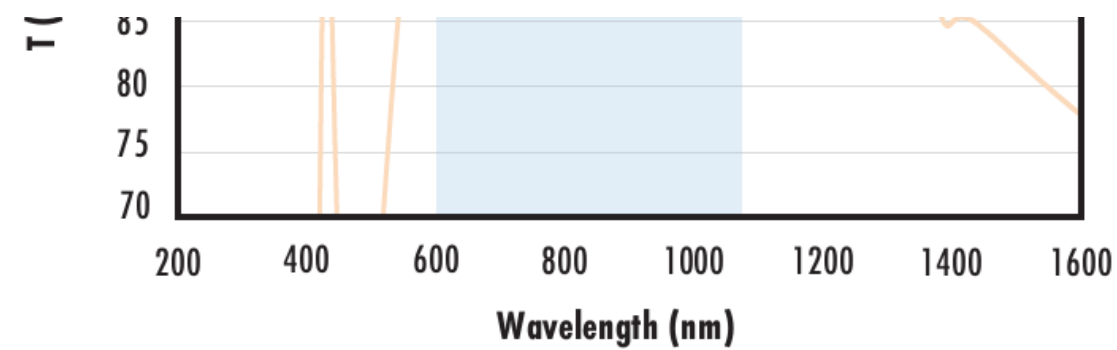

Data outside this range is not guaranteed and is for reference only.

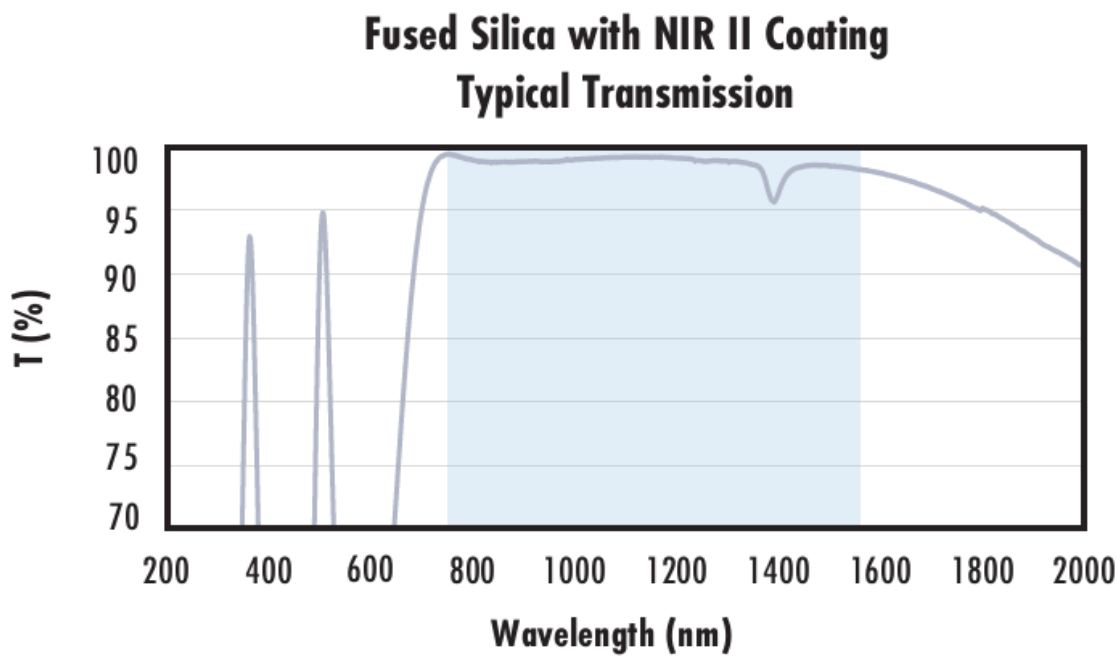[Click Here to Download Data](#)



Typical transmission of a 3mm thick fused silica window with NIR II (750 - 1550nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$\begin{aligned} R_{\text{abs}} &\leq 1.5\% @ 750 - 800\text{nm} \\ R_{\text{abs}} &\leq 1.0\% @ 800 - 1550\text{nm} \\ R_{\text{avg}} &\leq 0.7\% @ 750 - 1550\text{nm} \end{aligned}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

## CUSTOM

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).