

[See all 71 Products in Family](#)

Basler ace acA1600-60gc Color GigE Camera, CS Mount

See More by [Basler](#)



Basler ace GigE Cameras



Stock #74-905 **NEW** 1 In Stock

- 1 + **S\$1,148⁰⁰**

ADD TO CART

Volume Pricing	
Qty 1+	S\$1,148.00 each
Need More?	Request Quote

Product Downloads

Color **Spectrum:**

General

Color Camera **Type:**

acA1600-60gc **Model Number:**

Manufacturer:

Basler

Camera Series:

ace

Physical & Mechanical Properties

Dimensions (mm):

42 mm x 29 mm x 29 mm

Weight (g):

90

Housing:

Full

Sensor

Sensor Format:

1/1.8"

Resolution (Megapixels):

2.00

Frame Rate (fps):

60.00

Pixels (H x V):

1,600 x 1,200

Pixel Size, H x V (µm):

4.5 x 4.5

Sensing Area, H x V (mm):

7.2 x 5.4

Imaging Sensor:

e2v EV76C570

Type of Sensor:

Progressive Scan CMOS

Shutter Type:

Global and Rolling

Pixel Depth:

12 bit

Exposure Time:

Freely programmable

Machine Vision Standard:

GigE Vision, GenICam

Electrical

Power Consumption (W):

2.7 W

Hardware & Interface Connectivity

Interface:

GigE

Connector:

GigE, RJ45 with Screw Locks

Power Supply:

PoE or 12 VDC

GPIOs:

1 opto-coupled input line, 2 general purpose I/O (GPIO) lines

Synchronization:

Hardware Trigger (GPIO), Ethernet connection, or Free Run

Interface Port Orientation:

Back Panel

GPIO Connector Type:

M8 6-pin

Threading & Mounting

Mount:

CS-Mount

Mounting Threads:

1/4-20 with Tripod Mount Adapter #16-641

Environmental & Durability Factors

Operating Temperature (°C):

0 °C - 50 °C

Regulatory Compliance

Certificate of Conformance:


[View](#)

Product Details

- Perfect Analog Replacement
- Ultra-Small Form Factor
- Power Over Ethernet (PoE)
- Includes Basler Pylon Driver

Basler ace GigE Cameras are economical Gigabit Ethernet cameras that provide an ideal upgrade opportunity for analog camera users. With a small form factor matching that of many analog cameras (29 x 29mm), the ace can be a drop-in replacement to an existing analog system or a great choice to start a new project. Basler ace GigE Cameras can use Power Over Ethernet (PoE) (2 GigE cables required). The cameras can have long cable lengths and are the optimal choice for use on a factory floor. All cameras include the industry-proven Basler Pylon SDK Software and Driver.

Technical Information

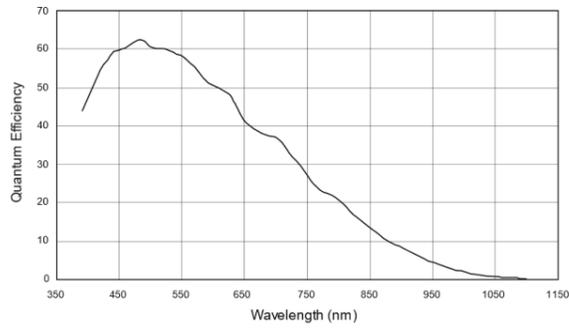

MT9P031 Sensor QE Curve
